

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUBMIT IN TRIPLICATE*

FORM APPROVED
OMB NO. 1040-0136
Expires: February 28, 1995

APPLICATION FOR PERMIT TO DRILL OR DEEPEN

TYPE OF WORK DRILL <input checked="" type="checkbox"/> DEEPEN <input type="checkbox"/>		5. LEASE DESIGNATION AND SERIAL NO. UTU-01089
TYPE OF WELL <input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> SINGLE <input checked="" type="checkbox"/> MULTIPLE <input type="checkbox"/> OIL WELL GAS WELL OTHER ZONE ZONE		6. IF INDIAN, ALLOTTEE OR TRIBE NAME N/A
2. NAME OF OPERATOR QEP UINTA BASIN, INC.		7. UNIT AGREEMENT NAME WHITE RIVER UNIT
3. ADDRESS 11002 E. 17500 S. Vernal, Ut 84078		8. FARM OR LEASE NAME, WELL NO. WRU EIH 3AML-35-8-22
Contact: Jan Nelson E-Mail: jan.nelson@questar.com		9. API NUMBER: 43-047-38644
Telephone number Phone 435-781-4331 Fax 435-781-4323		10. FIELD AND POOL, OR WILDCAT WHITE RIVER
4. LOCATION OF WELL (Report location clearly and in accordance with and State requirements*) At Surface 635832X 191' FNL 2555' FWL NENW SECTION 35 T8S R22E At proposed production zone 4438319Y 40.086096 -109.406780		11. SEC., T, R, M, OR BLK & SURVEY OR AREA SEC.35, T8S, R22E Mer SLB
14. DISTANCE IN MILES FROM NEAREST TOWN OR POSTOFFICE* 25 +/- SOUTHEAST OF VERNAL, UTAH		12. COUNTY OR PARISH Uintah
15. DISTANCE FROM PROPOSED LOCATION TO NEAREST PROPERTY OR LEASE LINE, FT. (also to nearest drig, unit line if any) 191' +/-		13. STATE UT
16. NO. OF ACRES IN LEASE 640.00		17. NO. OF ACRES ASSIGNED TO THIS WELL 20
18. DISTANCE FROM PROPOSED location to nearest well, drilling, completed, applied for, on this lease, ft 1000' +/-		20. BLM/BIA Bond No. on file ESB000024
21. ELEVATIONS (Show whether DF, RT, GR, ect.) 4846.7' GR		22. DATE WORK WILL START ASAP
23. Estimated duration 14 days		
24. Attachments		

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- Well plat certified by a registered surveyor.
- A Drilling Plan
- A surface Use Plan (if location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
- Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- Operator certification.
- Such other site specific information and/or plans as may be required by the authorized officer.

SIGNED

Name (printed/typed) Jan Nelson

DATE 9-18-06

TITLE Regulatory Affairs

(This space for Federal or State office use)

PERMIT NO.

APPROVAL DATE

CONDITIONS OF APPROVAL, IF ANY:

APPROVED BY

TITLE

BRADLEY G. HILL
ENVIRONMENTAL MANAGER

DATE

*See Instructions On Reverse Side

Title 18 U.S.C Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction

Federal Approval of this
Action is Necessary

CONFIDENTIAL

RECEIVED

SEP 21 2006

DIV. OF OIL, GAS & MINING

(NAD 83)
LATITUDE = 40°05'09.96" (40.086100)
LONGITUDE = 109°24'26.65" (109.407403)
(NAD 27)
LATITUDE = 40°05'10.09" (40.086136)
LONGITUDE = 109°24'24.19" (109.406719)

Lessee's or Operator's Representative:

Jan Nelson
Red Wash Rep.
QEP Uinta Basin, Inc.
11002 East 17500 South
Vernal, Utah 84078
(435) 781-4331


Certification:

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil & Gas Orders, the approved plan of operations, and any applicable Notice to Lessees.

QEP Uinta Basin Inc. will be fully responsible for the actions of their subcontractors.

A complete copy of the approved Application for Permit to Drill will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access route; that I am familiar with the conditions which currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by QEP Uinta Basin, Inc. it's contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of 18 U.S.C. 1001 for the filing of a false statement.



Jan Nelson
Red Wash Representative

18-Sep-06

Date

Additional Operator Remarks

QEP Uinta Basin, Inc. proposes to drill a well to 10,000' to test the MesaVerde. If productive, casing will be run and the well completed. If dry, the well will be plugged and abandoned as per BLM and State of Utah requirements"

Please see QEP Uinta Basin, Inc. Standard Operating Practices dated October 18, 2005, for Mesa Verde Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and Undesignated fields in Townships 07, 08 and 09 South, Ranges 21 to 25 East.

Please be advised that QEP Uinta Basin Inc. agrees to be responsible under the terms and conditions of the lease for the operations conducted upon the lease lands.

Bond coverage for this well is provided by Bond No.ESB000024. The principal is QEP Uinta Basin Inc. via surety as consent as provided for the 43 CFR 3104.2.

DRILLING PROGRAM

ONSHORE OIL & GAS ORDER NO. 1

Approval of Operations on Onshore
Federal Oil and Gas Leases

All lease and/or unit operations will be conducted in such a manner that full compliance is made with applicable laws, regulations (43 CFR 3100), Onshore Oil and Gas No. 1, and the approved plan of operations. The operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished the field representative to insure compliance.

1. **Formation Tops**

The estimated tops of important geologic markers are as follows:

<u>Formation</u>	<u>Depth, TVD</u>
Uinta	Surface
Green River	2,220'
Mahogany	2,850'
Wasatch	5,220'
Mesaverde	7,635'
Sego	9,900'
TD	10,000'

2. **Anticipated Depths of Oil Gas Water and Other Mineral Bearing Zones**

The estimated depths at which the top and bottom of the anticipated water, oil, gas, or other mineral bearing formations are expected to be encountered are as follows:

<u>Substance</u>	<u>Formation</u>	<u>Depth, TVD</u>
Gas	Wasatch	5,220'
Gas	Mesaverde	7,635'

All fresh water and prospectively valuable minerals encountered during drilling, will be recorded by depth and adequately protected. All oil and gas shows will be tested to determine commercial potential.

All water shows and water-bearing sands will be reported to the BLM in Vernal, Utah. Copies of State of Utah form OGC-8-X are acceptable. If flows are detected, samples will be submitted to the BLM along with any water analyses conducted. Fresh water will be obtained from Wonsits Valley water right # A36125 (which was filed on May 7, 1964,) or Red Wash water right # 49-2153 (which was filed on March 25, 1960). It was determined by the Fish and Wildlife Service that any water right number filed before 1989 is not depleting to the Upper Colorado River System, to supply fresh water for drilling purposes. All water resulting from drilling operations will be disposed of at Red Wash Central Battery Disposal Site; SWSE, Section 27, T7S, R23E or Wonsits Valley Disposal Site; SWNW, Section 12, T8S, R21E.

DRILLING PROGRAM

3. Operator's Specification for Pressure Control Equipment:

- A. 5,000 psi W.P. Double Gate BOP, 5,000 psi annular (schematic attached)
- B. Functional test daily
- C. All casing strings shall be pressure tested (0.22 psi/foot or 1500 psi, whichever is greater) prior to drilling the plug after cementing; test pressure shall not exceed the internal yield pressure of the casing.
- D. Ram type preventers and associated equipment shall be tested to approved stack working pressure if isolated by test plug or to 50 percent of internal yield pressure of casing whichever is less. BOP and related equipment shall meet the minimum requirements of Onshore Oil and Gas Order No. 2 for equipment and testing requirements, procedures, etc..., for a 5M system and individual components shall be operable as designed.

4. Casing Program

Hole Size	Csg. Size	Top (MD)	Bottom (MD)	Wt.	Grade	Thread	Cond.
20"	14"	sfc	40'	Steel	Cond.	None	Used
12-1/4"	9-5/8"	sfc	700'	36.0	J-55	STC	New
7-7/8"	4-1/2"	sfc	1 0,000'	11.6	P-110	LTC	New

Casing Strengths:				Collapse	Burst	Tensile (minimum)
9-5/8"	36.0 lb.	J-55	STC	2,020 psi	3,520 psi	394,000 lb.
4-1/2"	11.6 lb.	P-110	LTC	7,580 psi	10,690 psi	279,000 lb.

DRILLING PROGRAM

5. Auxiliary Equipment

- A. Kelly Cock – yes
- B. Float at the bit – no
- C. Monitoring equipment on the mud system – visually and/or PVT/Flow Show
- D. Full opening safety valve on the rig floor – yes
- E. Rotating Head – yes
- F. If drilling with air the following will be used:
- G. The blooie line shall be at least 6" in diameter and extend at least 100' from the well bore into the reserve/blooie pit.
- H. Blooie line ignition shall be provided by a continuous pilot (ignited when drilling below 500').
- I. Compressor shall be tied directly to the blooie line through a manifold.
- J. A mister with a continuous stream of water shall be installed near the end of the blooie lines for dust suppression.

Surface hole will be drilled with air, air/mist, foam, or mud depending on hole conditions. Drilling below surface casing will be with water based drilling fluids consisting primarily of fresh water, bentonite, lignite, caustic, lime, soda ash and polymers. No chromates will be used. It is not intended to use oil in the mud, however, in the event it is used, oil concentration will be less than 4% by volume. Maximum anticipated mud weight is 10.5 ppg.

No minimum quantity of weight material will be required to be kept on location.

PVT/Flow Show will be used from base of surface casing to TD.
Gas detector will be used from surface casing depth to TD.

6. Testing, logging and coring program

- A. Cores – none anticipated
- B. DST – none anticipated
- C. Logging – Mud Logging – 1500' to TD
GR-SP-Induction - Neutron Density

DRILLING PROGRAM

- D. Formation and Completion Interval: Green River/Wasatch/MesaVerde interval, final determination of completion will be made by analysis of logs.
Stimulation: Stimulation will be designed for the particular area of interest as encountered.

7. Cementing Program

14" Conductor:

Cement to surface with construction cement.

9-5/8" Surface Casing: sfc - 700' (MD)

Lead/Tail Slurry: 0' - 700'. 375 sks (440 cu ft) Premium AG cement + 2% CaCl_2 + 0.25 lb/sk celloflake. Slurry wt: 15.8 ppg, Slurry yield: 1.17 ft³/sk, Slurry volume: 12-1/4" hole + 100% excess.

4-1/2" Production Casing: sfc - 10,000' (MD)

Lead Slurry: 0' - 4,800'. 360 sks (1385 cu ft) Halliburton Hi-Fill cement + 16% Bentonite + 0.75% Econolite + 3% salt + 0.8% HR-7 retarder. Slurry wt: 11.0 ppg, Slurry yield: 3.84 ft³/sk, Slurry volume: 7-7/8" hole + 25% excess in open hole section.

Tail Slurry: 4,800' - 10,000'. 1195 sks (1480 cu ft) of 50/50 Poz Premium AG + 2.0% Bentonite + 0.6% Halad (R)-322 fluid loss + 2.0% Microbond M expander + 5% salt + 0.2% HR-5 retarder + 0.25 lb/sk Flocele. Slurry wt: 14.35 ppg, Slurry yield: 1.24 ft³/sk, Slurry volume: 7-7/8" hole + 25% excess.

*Final cement volumes to be calculated from caliper log with an attempt to be made to circulate cement to the surface. A bond log will be run across the zone of interest and across zones as required by the authorized officer to insure protection of natural resources.

8. Anticipated Abnormal Pressures and Temperatures, Other Potential Hazards

No abnormal temperatures or pressures are anticipated. No H₂S has been encountered in or known to exist from previous wells drilled to similar depths in the general area. Maximum anticipated bottom hole pressure equals approximately 5460 psi. Maximum anticipated bottom hole temperature is 190° F.

5M BOP STACK

11" Rotating Head

11" Spacer Spool

11" 5M Annular

11" 5M Double Ram

11" 5M x 5M Multi-Bowl Head

9 5/8" 5M Casing Head


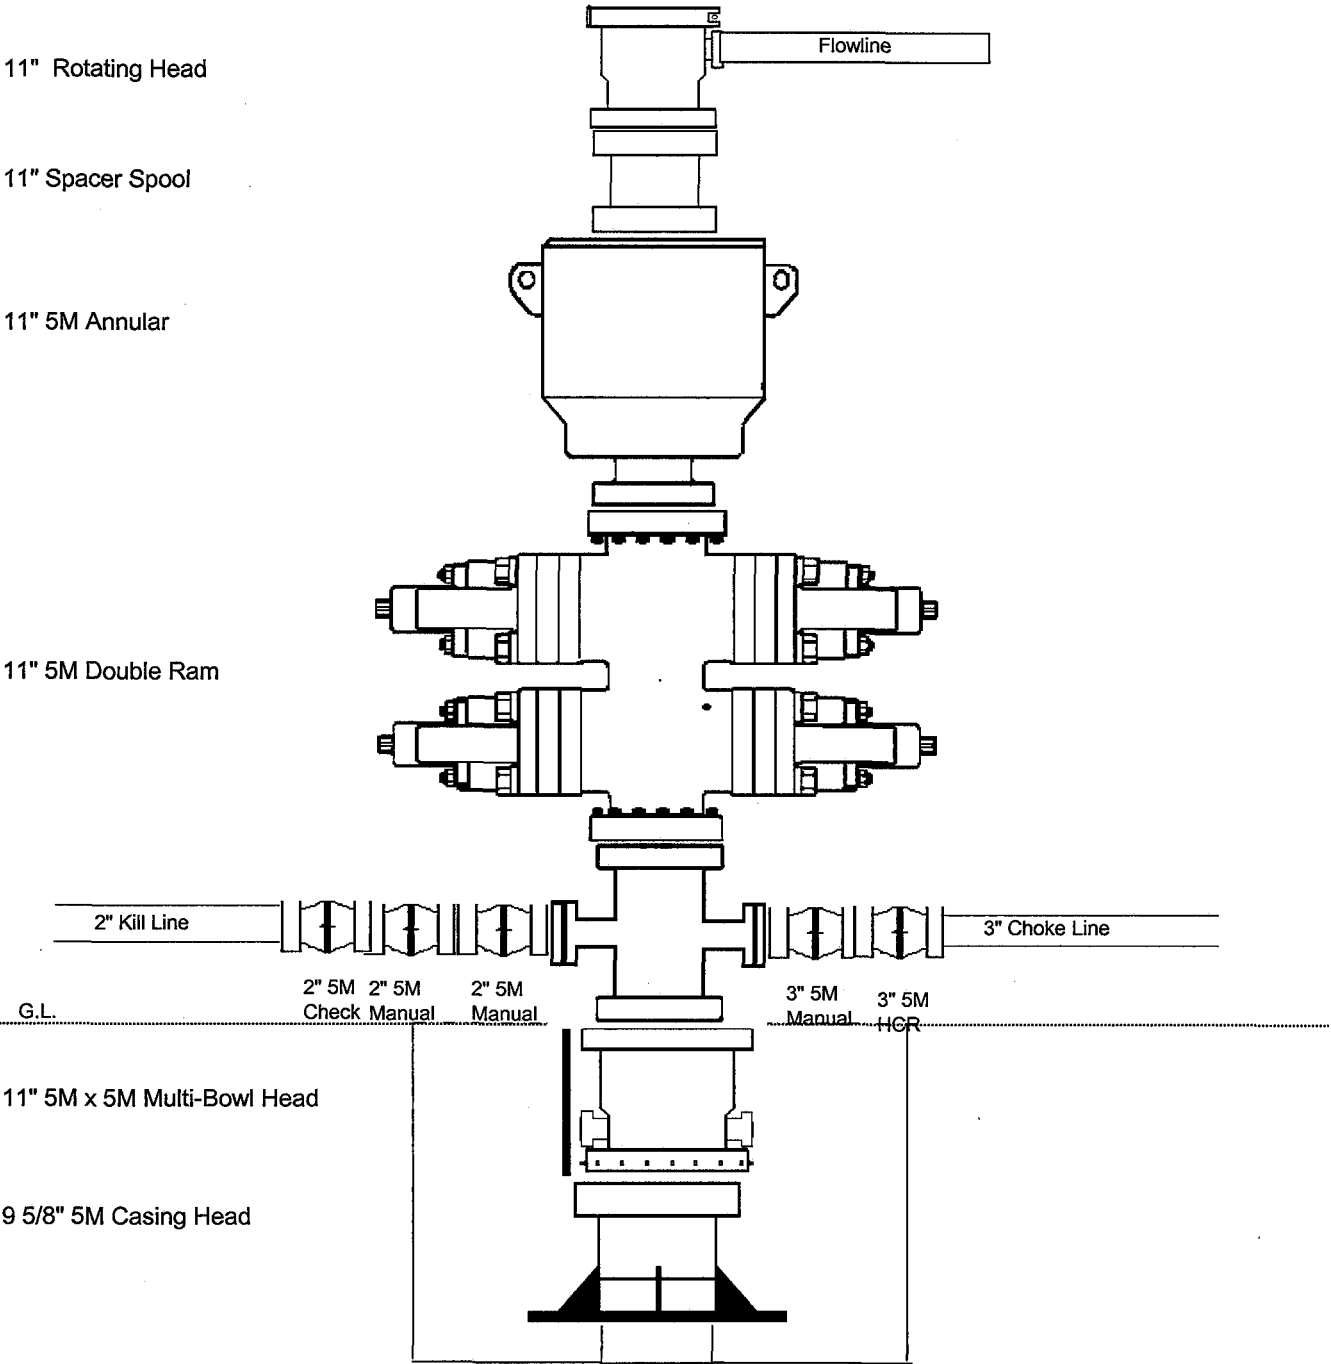


EXHIBIT B CONTINUED

Federal Register / Vol. 53, No. 223 / Friday, November 18, 1988 / Rules and Regulations

46813

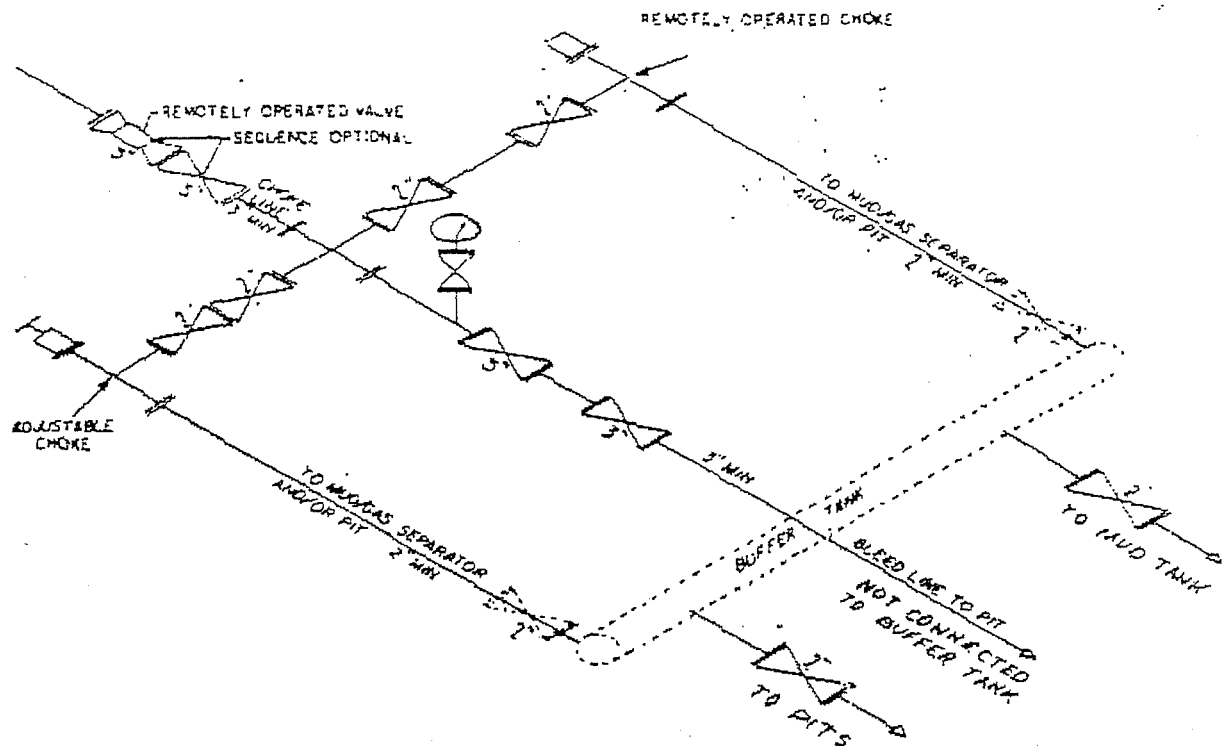

② 5M CHOKE MANIFOLD EQUIPMENT - CONFIGURATION OF CHOKES MAY VARY

[FR Doc. 88-28738 Filed 11-17-88; 8:45 am]
 BILLING CODE 4210-04-C

**QEP UINTA BASIN, INC.
WRU EIH 3AML-35-8-22
191' FNL 2555' FWL
NENW, SECTION 35, T8S, R22E
UINTAH COUNTY, UTAH
LEASE # UTU-01089**

ONSHORE ORDER NO. 1

MULTI – POINT SURFACE USE & OPERATIONS PLAN

An onsite inspection was conducted for the WRU EIH 3AML-35-8-22 on September 13, 2006 . Weather conditions were warm and clear at the time of the onsite. In attendance at the inspection were the following individuals:

Paul Buhler	Bureau of Land Management
Amy Torres	Bureau of Land Management
Jan Nelson	QEP Uinta Basin Inc.

1. Existing Roads:

The proposed well site is approximately 25 miles southeast of Vernal, Utah.

Refer to Topo Maps A and B for location of access roads within a 2 – mile radius.

There will be no improvements made to existing roads.

2. Planned Access Roads:

Please see QEP Uinta Basin, Inc. Standard Operating Practices dated October 18, 2005, for Mesa Verde Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and Undesignated fields in Townships 07, 08 and 09 South, Ranges 21 to 25 East.

Refer to Topo Map B for the location of the proposed access road.

3. Location of Existing Wells Within a 1 – Mile Radius:

Please refer to Topo Map C.

4. Location of Existing & Proposed Facilities:

Please see QEP Uinta Basin, Inc. Standard Operating Practices dated October 18, 2005, for Mesa Verde Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and Undesignated fields in Townships 07, 08 and 09 South, Ranges 21 to 25 East.

Refer to Topo Map D for the location of the proposed pipeline.

QEP requests a surface pipeline based on the following justification included in the attached "Request for Exception".

5. Location and Type of Water Supply:

Please see QEP Uinta Basin, Inc. Standard Operating Practices dated October 18, 2005, for Mesa Verde Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and Undesignated fields in Townships 07, 08 and 09 South, Ranges 21 to 25 East.

6. Source of Construction Materials:

Please see QEP Uinta Basin, Inc. Standard Operating Practices dated October 18, 2005, for Mesa Verde Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and Undesignated fields in Townships 07, 08 and 09 South, Ranges 21 to 25 East.

7. Methods of Handling Waste Materials:

Please see QEP Uinta Basin, Inc. Standard Operating Practices dated October 18, 2005, for Mesa Verde Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and Undesignated fields in Townships 07, 08 and 09 South, Ranges 21 to 25 East.

8. Ancillary Facilities:

Please see QEP Uinta Basin, Inc. Standard Operating Practices dated October 18, 2005, for Mesa Verde Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and Undesignated fields in Townships 07, 08 and 09 South, Ranges 21 to 25 East.

9. Well Site Layout: (See Location Layout Diagram)

The attached Location Layout Diagram describes drill pad cross-sections, cuts and fills and locations of the mud tanks, reserve pit, flare pit, pipe racks, trailer parking, spoil dirt stockpile(s), and surface material stockpile(s).

Please see the attached diagram to describe rig orientation, parking areas, and access roads.

A pit liner is required. A felt pit liner will be required if bedrock is encountered.

10. Plans for Reclamation of the Surface:

Please see QEP Uinta Basin, Inc. Standard Operating Practices dated October 18, 2005, for Mesa Verde Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and Undesignated fields in Townships 07, 08 and 09 South, Ranges 21 to 25 East.

Interim Reclamation

Please see attached Interim Reclamation plan.

Once the well is put onto production, QEP will reclaim as much of the well pad as possible that will allow for operations to continue in a safe and reasonable manner. Reseeding will be done in the spring or fall of every year to allow winter precipitation to aid in the success of reclamation.

Seed Mix:

Interim Reclamation:

6 lbs Hycrest Crested Wheatgrass

6 lbs Needle & Threadgrass

Final Reclamation:

Seed Mix # 1 3 lbs. Fourwing Saltbush, 3 lbs. Indian Rice Grass, 4 lbs. Hycrest Crested Wheat Grass,
1 lb. Needle & Threadgrass

11. Surface Ownership:

Bureau of Land Management

170 South 500 East

Vernal, Utah 84078

(435) 781-4400

12. Other Information

A Class III archaeological survey was conducted by Montgomery Archaeology Consultants. A copy of this report was submitted directly to the appropriate agencies by Montgomery Archaeology Consultants. Cultural resource clearance was recommended for this location.

A class III paleontological survey was conducted by Intermountain Paleo Consulting. A copy of this report was submitted directly to the appropriate agencies by Stephen D. Sandau. The inspection resulted in the location of no fossil resources. However, if vertebrate fossil(s) are found during construction a paleontologist should be immediately notified. QEP will provide paleo monitor if needed.

There is a Burrowing Owl Stipulation from April 1st to August 15th. No construction or drilling will commence during this period unless otherwise determined by a wildlife biologist that the site is inactive.

Construct reservoir 50 yds. SE of stake # 4, divert drainage, use cobble rock for spillway.

One, 24" culvert will be installed on the proposed access road. Round corner # 8, to stay out of drainage. Rock and gravel as needed.

QEP will carry out Interim Reclamation mitigation for the habitat loss on well location WRU EIH 14W-26-8-22.

QEP Uinta Basin, Inc.
Request for Exception to Buried Pipeline
for
WRU EIH 3AML-35-8-22

QEP respectfully requests an exception to burying this pipeline. We understand the standard Condition of Approval (COA) that may be included in the approved Application for Permit to Drill (APD) is: *"As a Best Management Practice (BMP), the pipeline would be buried within the identified construction width of an access corridor that contains the access road and pipelines. The construction width for the access corridor would increase from 30 feet, by an additional 20 feet, to a total of 50 feet. Exceptions to this BMP may be granted where laterally extensive, hard indurated bedrock, such as sandstone, is at or within 2 feet of the surface; and, soil types with a poor history of successful rehabilitation."* QEP will install the pipeline within the access corridor and will avoid cross-country installation when possible. Our reason for requesting a surface line is based on the following justification:

Class IV VRM

- ◆ This area's designated Visual Resource Management is classified as Class IV. The Class IV objective is to provide for management activities that require major modification to the existing character of the landscape. The level of change to the landscape can be high. The management activities may dominate the view and may be the major focus of the viewer attention. However, every attempt should be made to minimize the impact of these activities through careful location, minimal disturbance, and repetition of the basic visual elements of form, line, color, and texture.
- ◆ QEP feels that surface pipe will comply with this classification more so than buried pipe due to the amount of surface disturbance that will be required to bury it. We believe surface installation within the access corridor will minimize the disturbance so that the pipeline does not dominate the view.

Environmental and Safety Concerns

- ◆ Buried pipe will greatly increase surface disturbance and habitat fragmentation. The soil in this area has a poor history of successful rehabilitation. Buried pipe will have an increased corrosion rate and would need to be dug up for repairs or replacement; the constant surface disturbance will not allow time for successful reclamation.
- ◆ Increasing surface disturbance will greatly increase noxious and invasive weed infestation.

- ♦ With the increased corrosion rate, buried pipe may have undetectable leaks that could go unnoticed for months. Small leaks may turn into large plumes of underground hazards because they are not easily monitored and not seen right away. An undetected leak also increases the potential for explosive incidents. Once detected, the surface will need to be disturbed, once again, to dig up the line and replace or repair it.
- ♦ Accidents associated with pipe breaks during construction activities could increase substantially as the number of buried lines increases.
- ♦ The additional surface disturbance will increase the risk of disturbing paleontological sites.

Operational and Mechanical Concerns for Gas Lines

- ♦ Cathodic protection will be required for buried pipe. Cathodic protection requires anode beds that must be maintained. This will add substantial costs in labor and material. Additional power lines will need to be installed to the anode beds. The additional costs for equipment and labor will be approximately \$50,000.00 per section.
- ♦ Pipeline markers need to be used with buried pipe. This will add costs in labor and material.
- ♦ Every tie in requires a valve. The average distance between valves is approximately ¼ mile. Valves will have to be placed in “freeze boxes” or “valve boxes”. Valve boxes will be considered confined space which increases the manpower needed to repair or replace valves. Every valve box will also require bright yellow guard rails.
- ♦ Additional equipment required for buried pipe can include blades/dozers, trenchers (cutting or blasting in hard rock), side booms, etc. which increases installation costs.
- ♦ Buried pipe must have fusion bonded epoxy (FBE) coating. FBE pipe will cost an additional \$2.00 per foot compared to bare pipe.
- ♦ This pipeline has the potential for being upgraded/upsized to a larger pipe diameter depending on production volumes. If upsizing is required, the pipe will need to be dug up which will cause additional surface disturbance and will not allow adequate time for successful reclamation.
- ♦ Surface lines are sometimes relocated to accommodate new locations; this is done in an effort to minimize the amount of pipe needed and the amount of surface disturbed. If this pipe is buried, this will no longer be an option.

QUESTAR EXPLR. & PROD.

WRU EIH #3AML-35-8-22

LOCATED IN UINTAH COUNTY, UTAH

SECTION 35, T8S, R22E, S.L.B.&M.

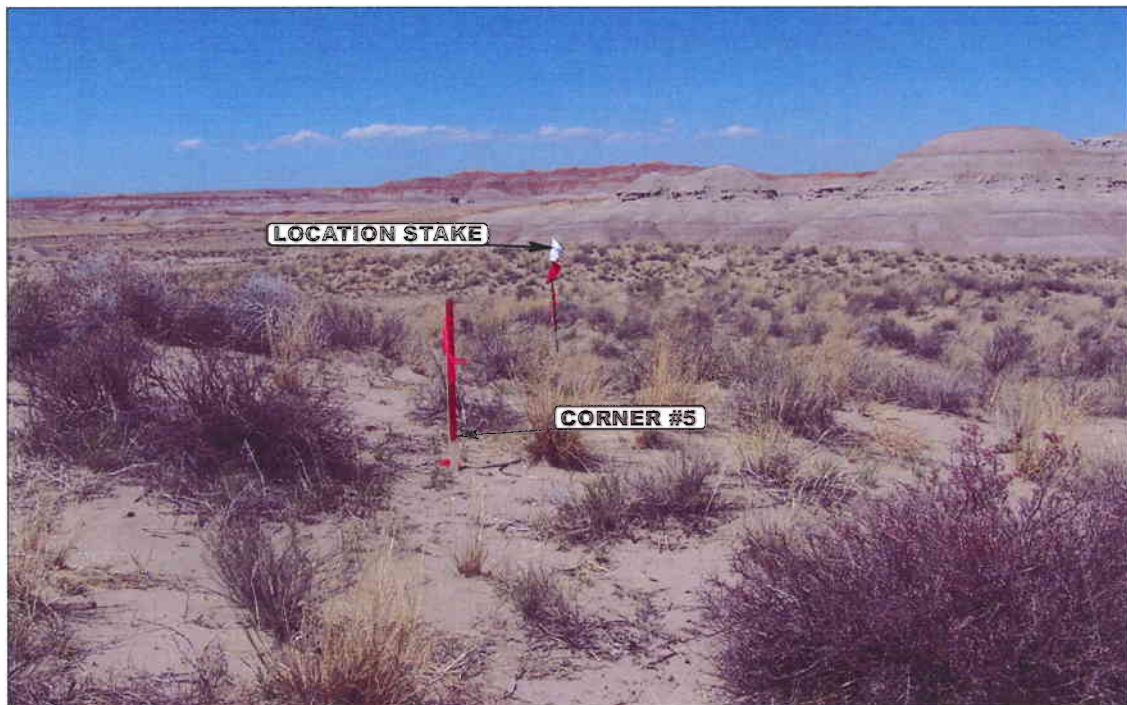


PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: NORTHERLY



PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: SOUTHEASTERLY



- Since 1964 -

UELS Uintah Engineering & Land Surveying

85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS

07 17 06
MONTH DAY YEAR

PHOTO

TAKEN BY: B.H.


DRAWN BY: C.P.

REVISED: 00-00-00

QUESTAR EXPLR. & PROD.


FIGURE #1

LOCATION LAYOUT FOR
WRU EIH #3AML-35-8-22
SECTION 35, T8S, R22E, S.L.B.&M.
191' FNL 2555' FWL



SCALE: 1" = 50'
DATE: 07-14-06
Drawn By: P.M.

NOTE:
Flare Pit is to be located
a min. of 100' from the
Well Head.

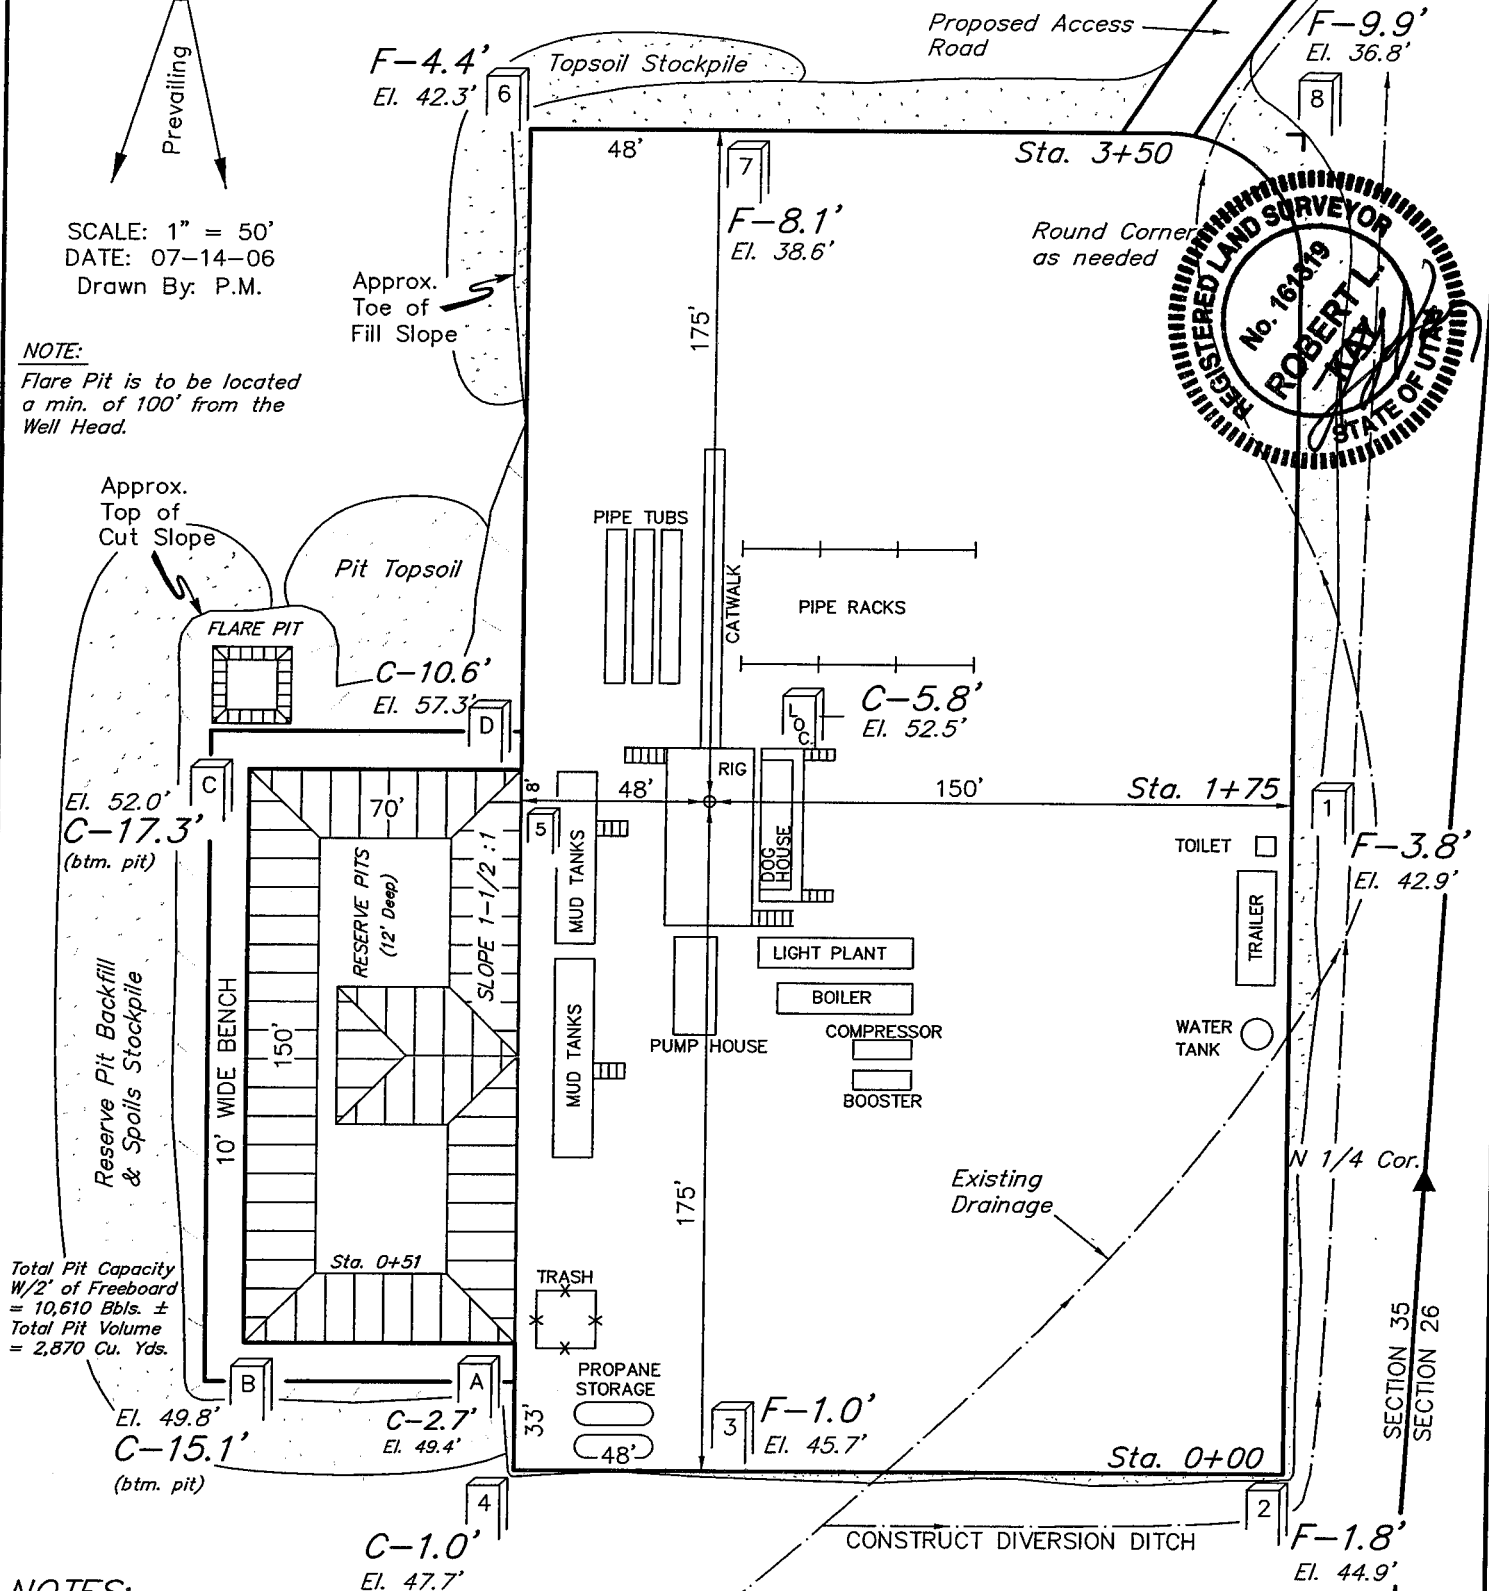

NOTES:

Elev. Ungraded Ground At Loc. Stake = 4852.5'
FINISHED GRADE ELEV. AT LOC. STAKE = 4846.7'

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017



QUESTAR EXPLR. & PROD.

FIGURE #2

TYPICAL CROSS SECTIONS FOR
WRU EIH #3AML-35-8-22
SECTION 35, T8S, R22E, S.L.B.&M.
191' FNL 2555' FWL

1" = 20'
X-Section
Scale
1" = 50'

DATE: 07-14-06
Drawn By: P.M.

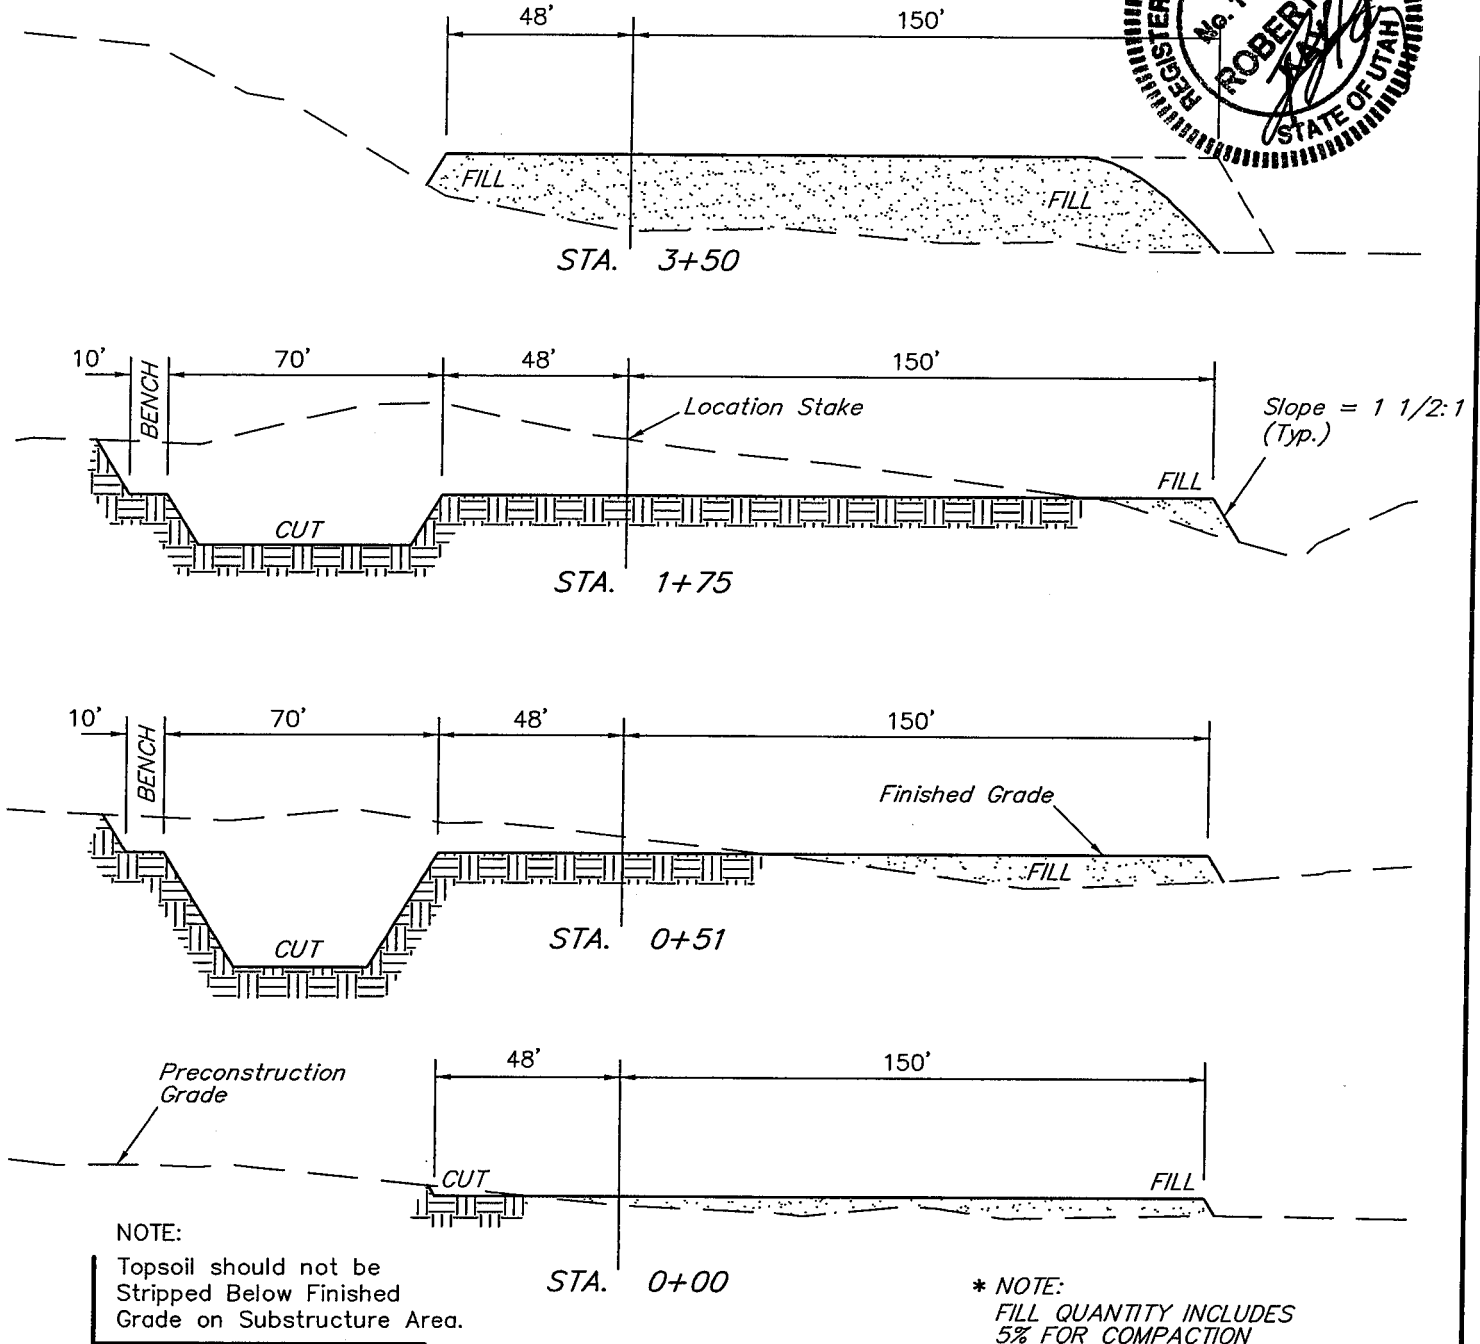

APPROXIMATE YARDAGES

CUT	
(6") Topsoil Stripping	= 1,780 Cu. Yds.
Remaining Location	= 9,050 Cu. Yds.
TOTAL CUT	= 10,830 CU.YDS.
FILL	= 7,610 CU.YDS.

EXCESS MATERIAL	= 3,220 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	= 3,220 Cu. Yds.
EXCESS UNBALANCE (After Interim Rehabilitation)	= 0 Cu. Yds.

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017

QUESTAR EXPLR. & PROD.



INTERIM RECLAMATION PLAN FOR

WRU EIH #3AML-35-8-22
SECTION 35, T8S, R22E, S.L.B.&M.
191' FNL 2555' FWL


FIGURE #3



SCALE: 1" = 50'
DATE: 07-14-06
Drawn By: P.M.

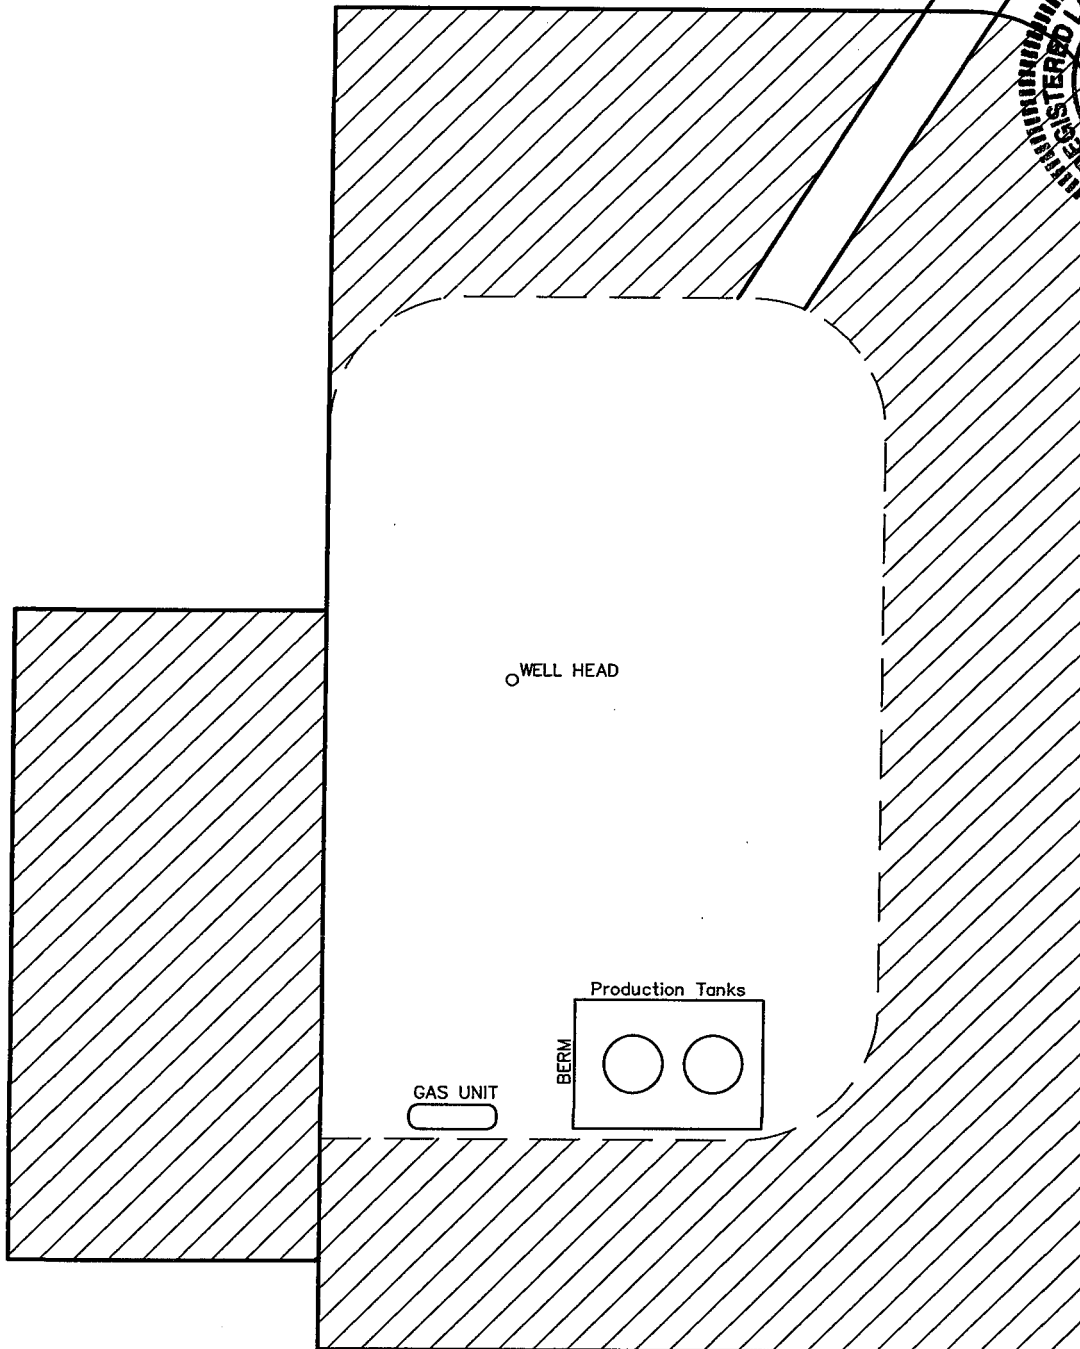

 INTERIM RECLAMATION

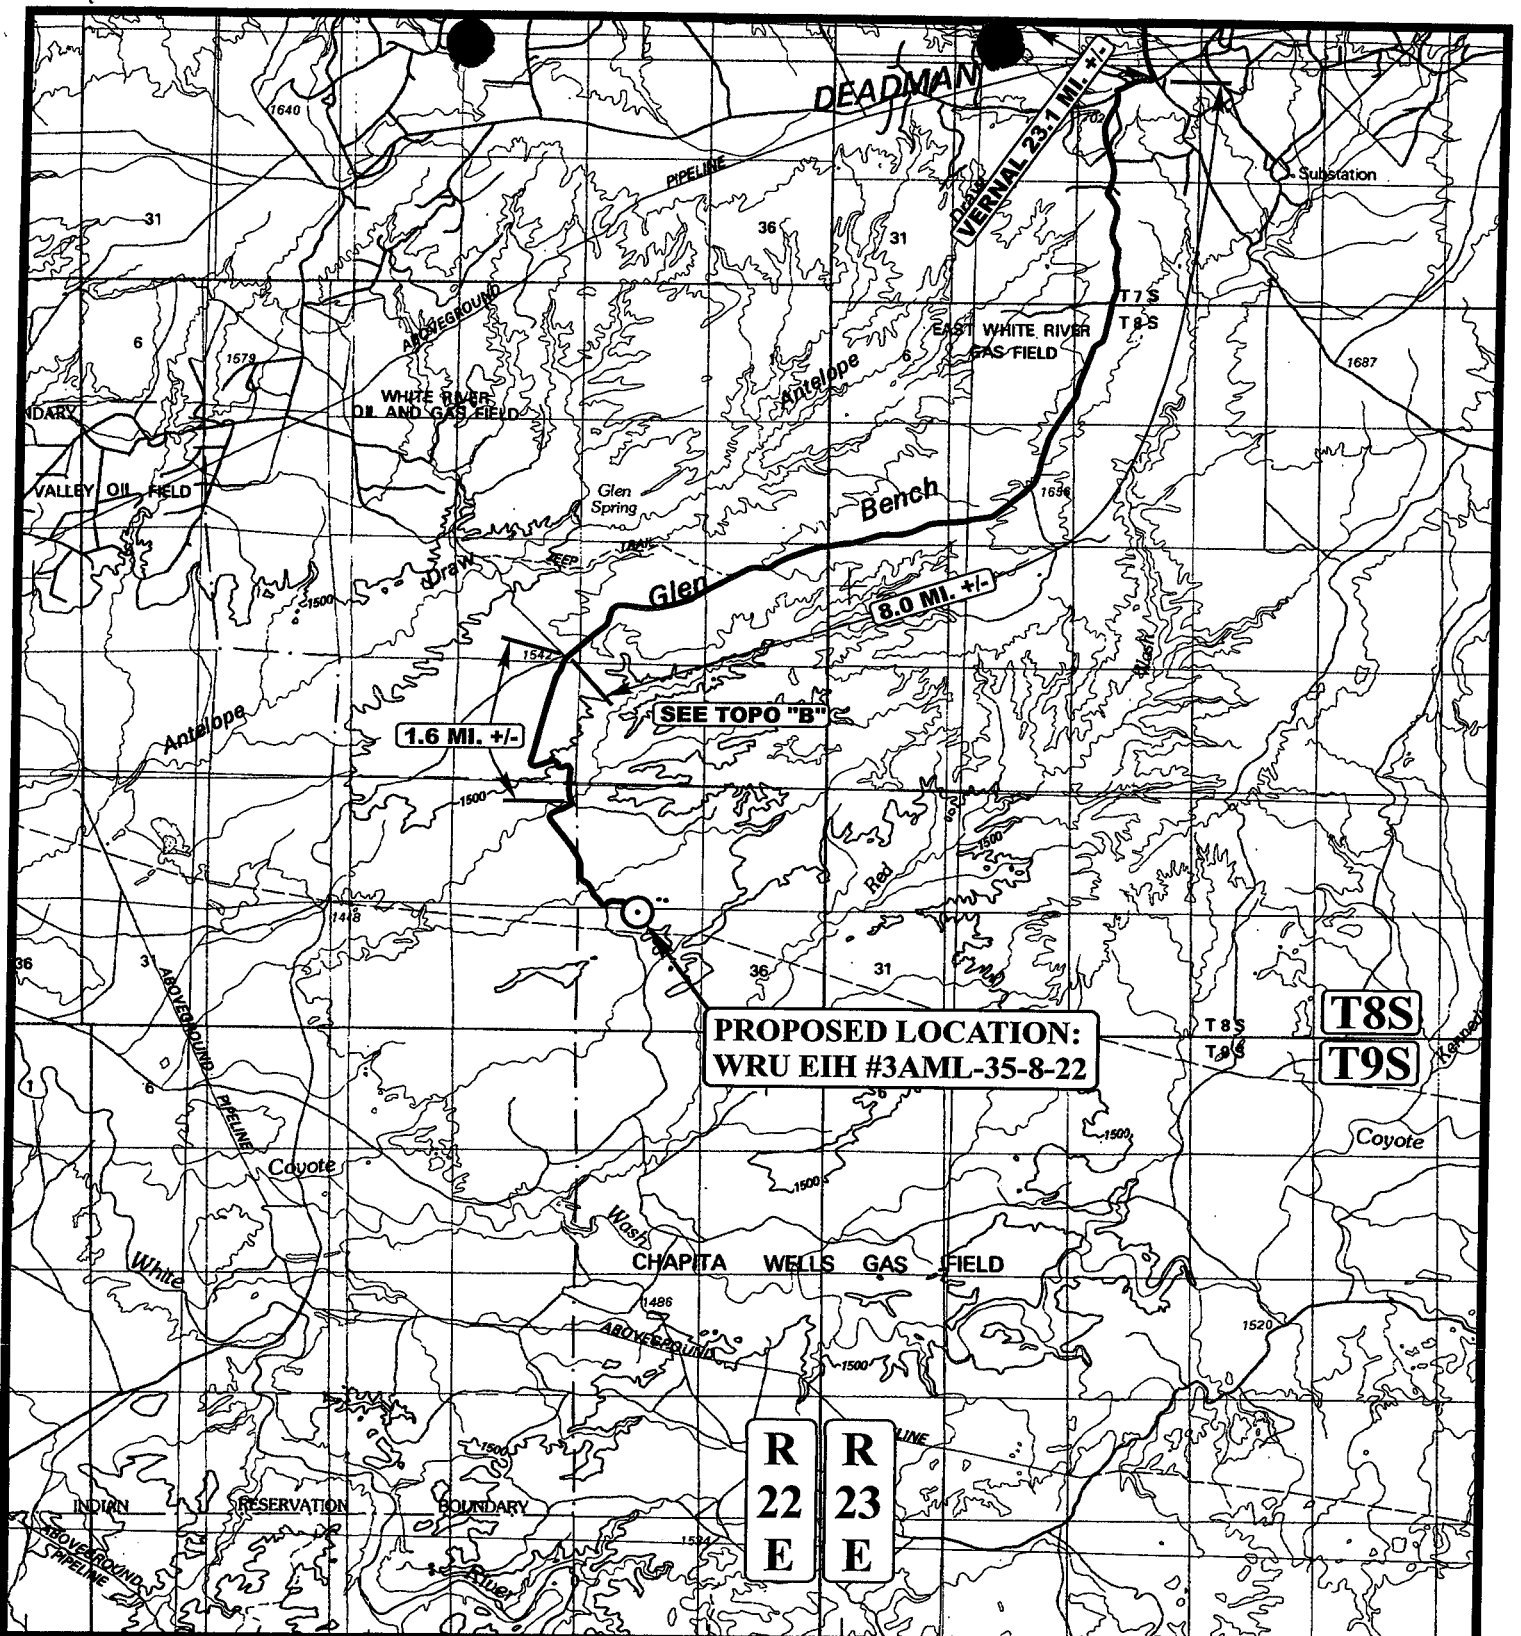

LEGEND:

⊙ PROPOSED LOCATION


UEIS
 Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813



QUESTAR EXPLR. & PROD.

WRU EIH #3AML-35-8-22
 SECTION 35, T8S, R22E, S.L.B.&M.
 191' FNL 2555' FWL

TOPOGRAPHIC MAP	07	17	06	A TOPO
	MONTH	DAY	YEAR	
SCALE: 1:100,000		DRAWN BY: C.P.		REVISED: 00-00-00

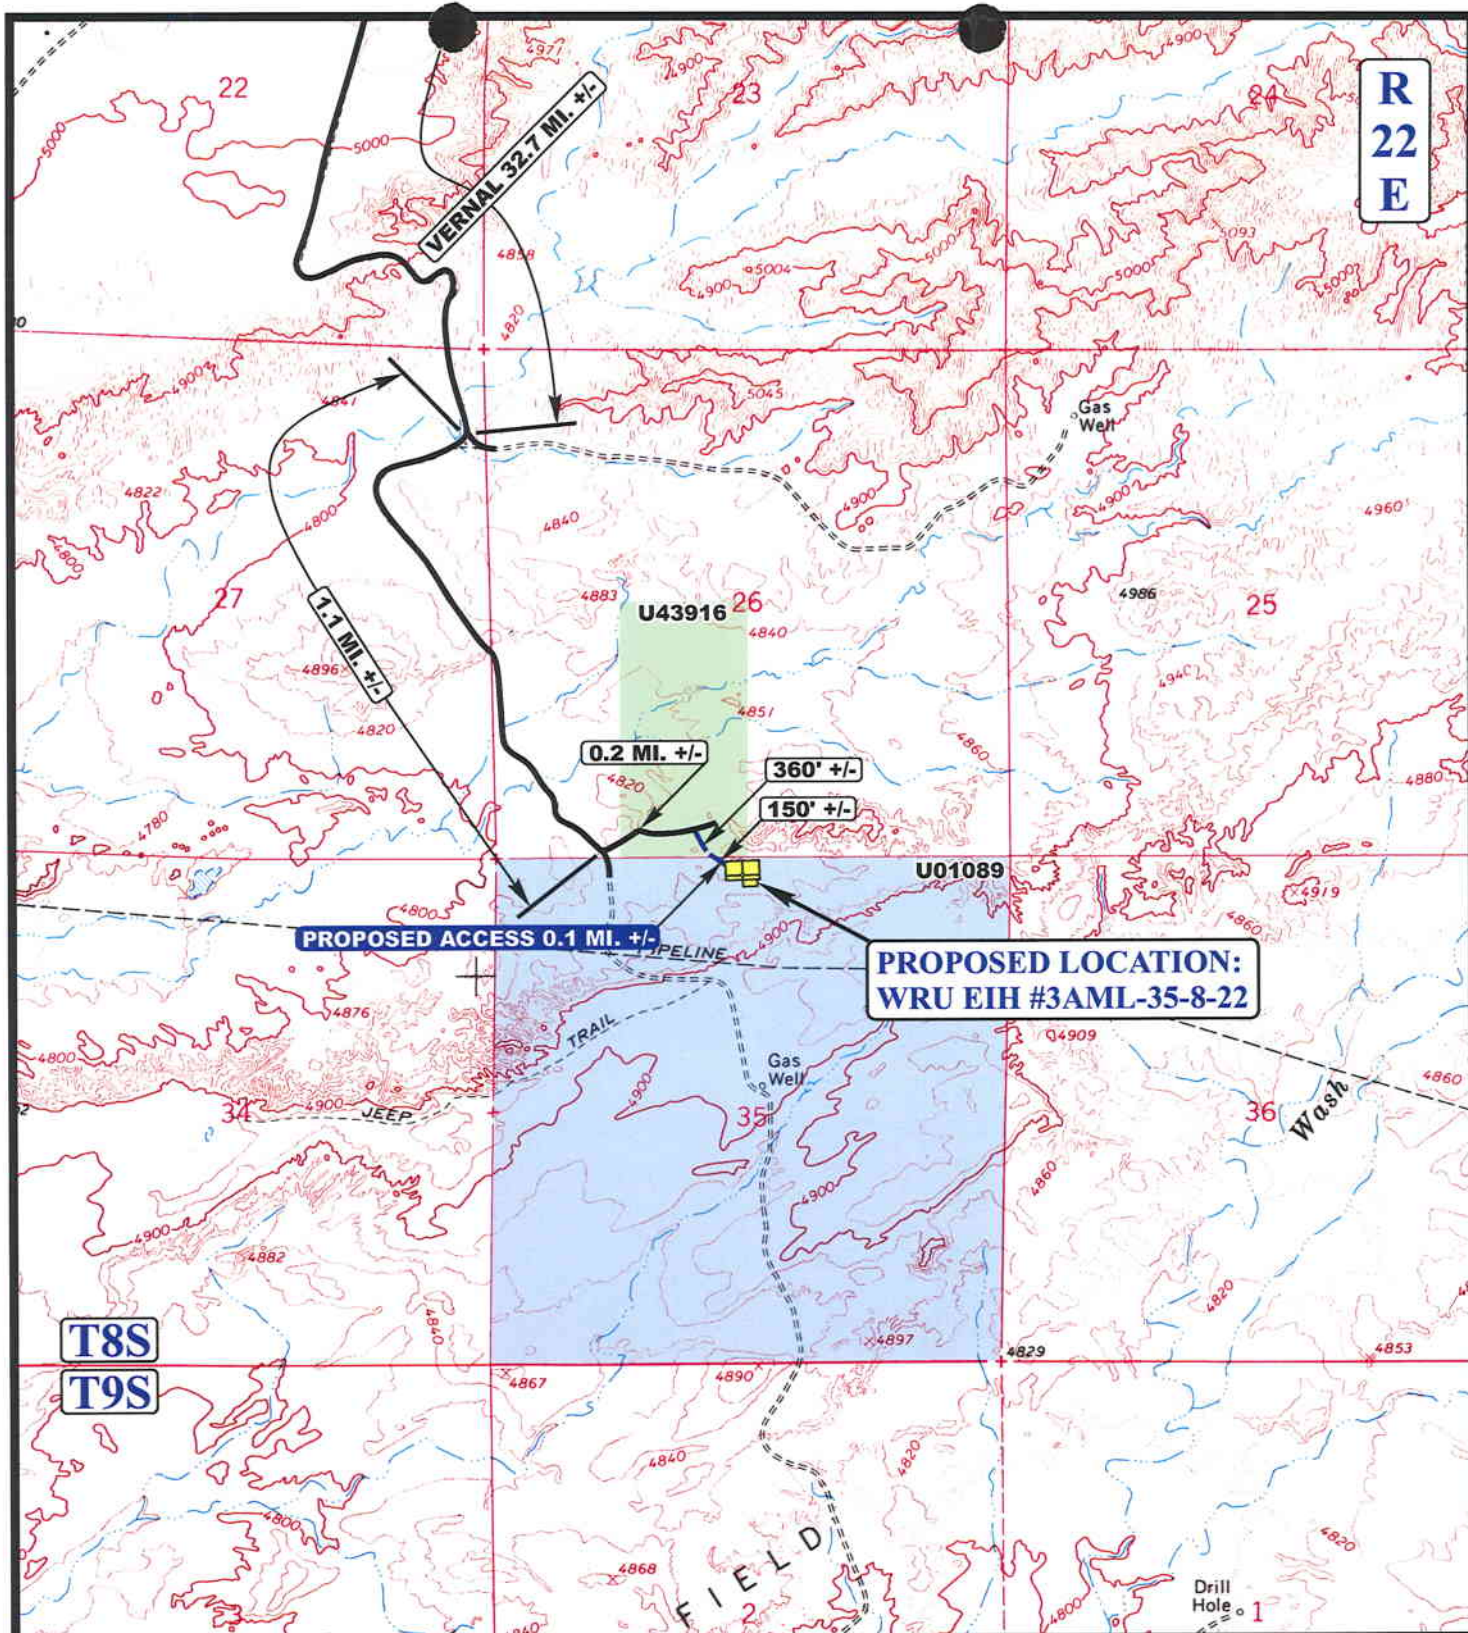

LEGEND:

EXISTING ROAD
 PROPOSED ACCESS ROAD

QUESTAR EXPLR. & PROD.

WRU EIH #3AML-35-8-22
SECTION 35, T8S, R22E, S.L.B.&M.
191' FNL 2555' FWL



Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC
MAP

07 17 06
MONTH DAY YEAR

SCALE: 1" = 2000' DRAWN BY: C.P. REVISED: 00-00-00



R
22
E

**PROPOSED LOCATION:
WRU EIH #3AML-35-8-22**

T8S
T9S

LEGEND:

- | | |
|-------------------|-------------------------|
| ○ DISPOSAL WELLS | ○ WATER WELLS |
| ● PRODUCING WELLS | ● ABANDONED WELLS |
| ● SHUT IN WELLS | ● TEMPORARILY ABANDONED |



Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813



QUESTAR EXPLR. & PROD.


WRU EIH #3AML-35-8-22
SECTION 35, T8S, R22E, S.L.B.&M.
191' FNL 2555' FWL

**TOPOGRAPHIC
MAP**

07 17 06
MONTH DAY YEAR

SCALE: 1" = 2000' DRAWN BY: C.P. REVISED: 00-00-00



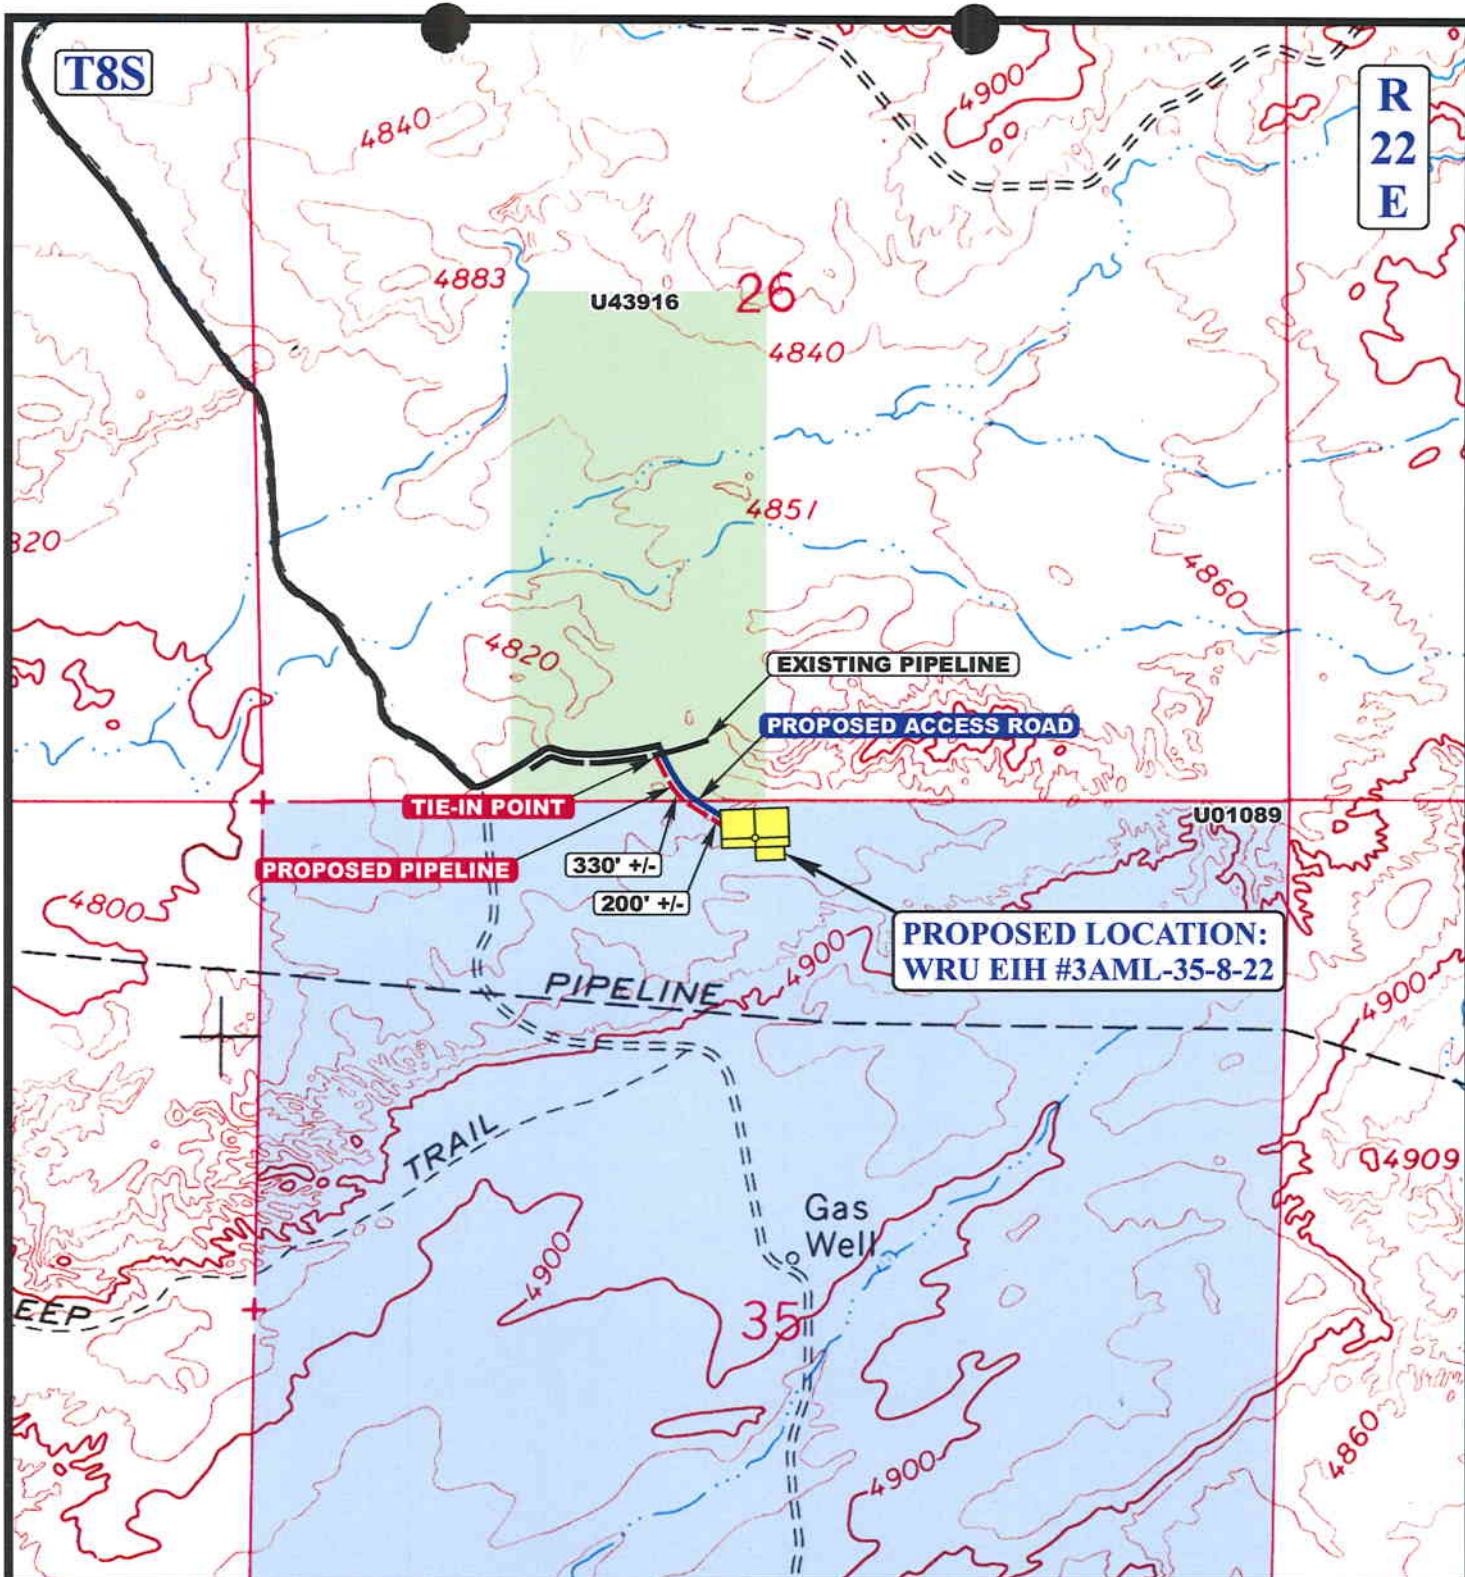

APPROXIMATE TOTAL PIPELINE DISTANCE = 530' +/-

LEGEND:

- PROPOSED ACCESS ROAD
- - - - - EXISTING PIPELINE
- - - - - PROPOSED PIPELINE



QUESTAR EXPLR. & PROD.

WRU EIH #3AML-35-8-22
SECTION 35, T8S, R22E, S.L.B.&M.
191' FNL 2555' FWL



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC
MAP

07 17 06
 MONTH DAY YEAR

SCALE: 1" = 1000' DRAWN BY: C.P. REVISED: 00-00-00



WORKSHEET
APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 09/21/2006

API NO. ASSIGNED: 43-047-38644

WELL NAME: WRU EIH 3AML-35-8-22

OPERATOR: QEP UINTA BASIN, INC. (N2460)

CONTACT: JAN NELSON

PHONE NUMBER: 435-781-4331

PROPOSED LOCATION:

NENW 35 080S 220E

SURFACE: 0191 FNL 2555 FWL

BOTTOM: 0191 FNL 2555 FWL

COUNTY: UINTAH

LATITUDE: 40.08610 LONGITUDE: -109.4068

UTM SURF EASTINGS: 635832 NORTHINGS: 4438319

FIELD NAME: NATURAL BUTTES (630)

INSPECT LOCATN BY: / /

Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LEASE TYPE: 1 - Federal

LEASE NUMBER: UTU-01089

SURFACE OWNER: 1 - Federal

PROPOSED FORMATION: MVRD

COALBED METHANE WELL? NO

RECEIVED AND/OR REVIEWED:

☒ Plat
☒ Bond: Fed[1] Ind[] Sta[] Fee[]
(No. ESB000024)
☒ Potash (Y/N)
☒ Oil Shale 190-5 (B) or 190-3 or 190-13
☒ Water Permit
(No. 43-8496)
☒ RDCC Review (Y/N)
(Date:)
☒ Fee Surf Agreement (Y/N)
☒ Intent to Commingle (Y/N)

LOCATION AND SITING:


___ R649-2-3.
Unit: WHITE RIVER
___ R649-3-2. General
Siting: 460 From Qtr/Qtr & 920' Between Wells
___ R649-3-3. Exception
☒ Drilling Unit
Board Cause No: 187-08
Eff Date: 8-23-2006
Siting: Suspends General Siting
___ R649-3-11. Directional Drill

COMMENTS:

Sup. Separated File

STIPULATIONS:

1 Federal Approval

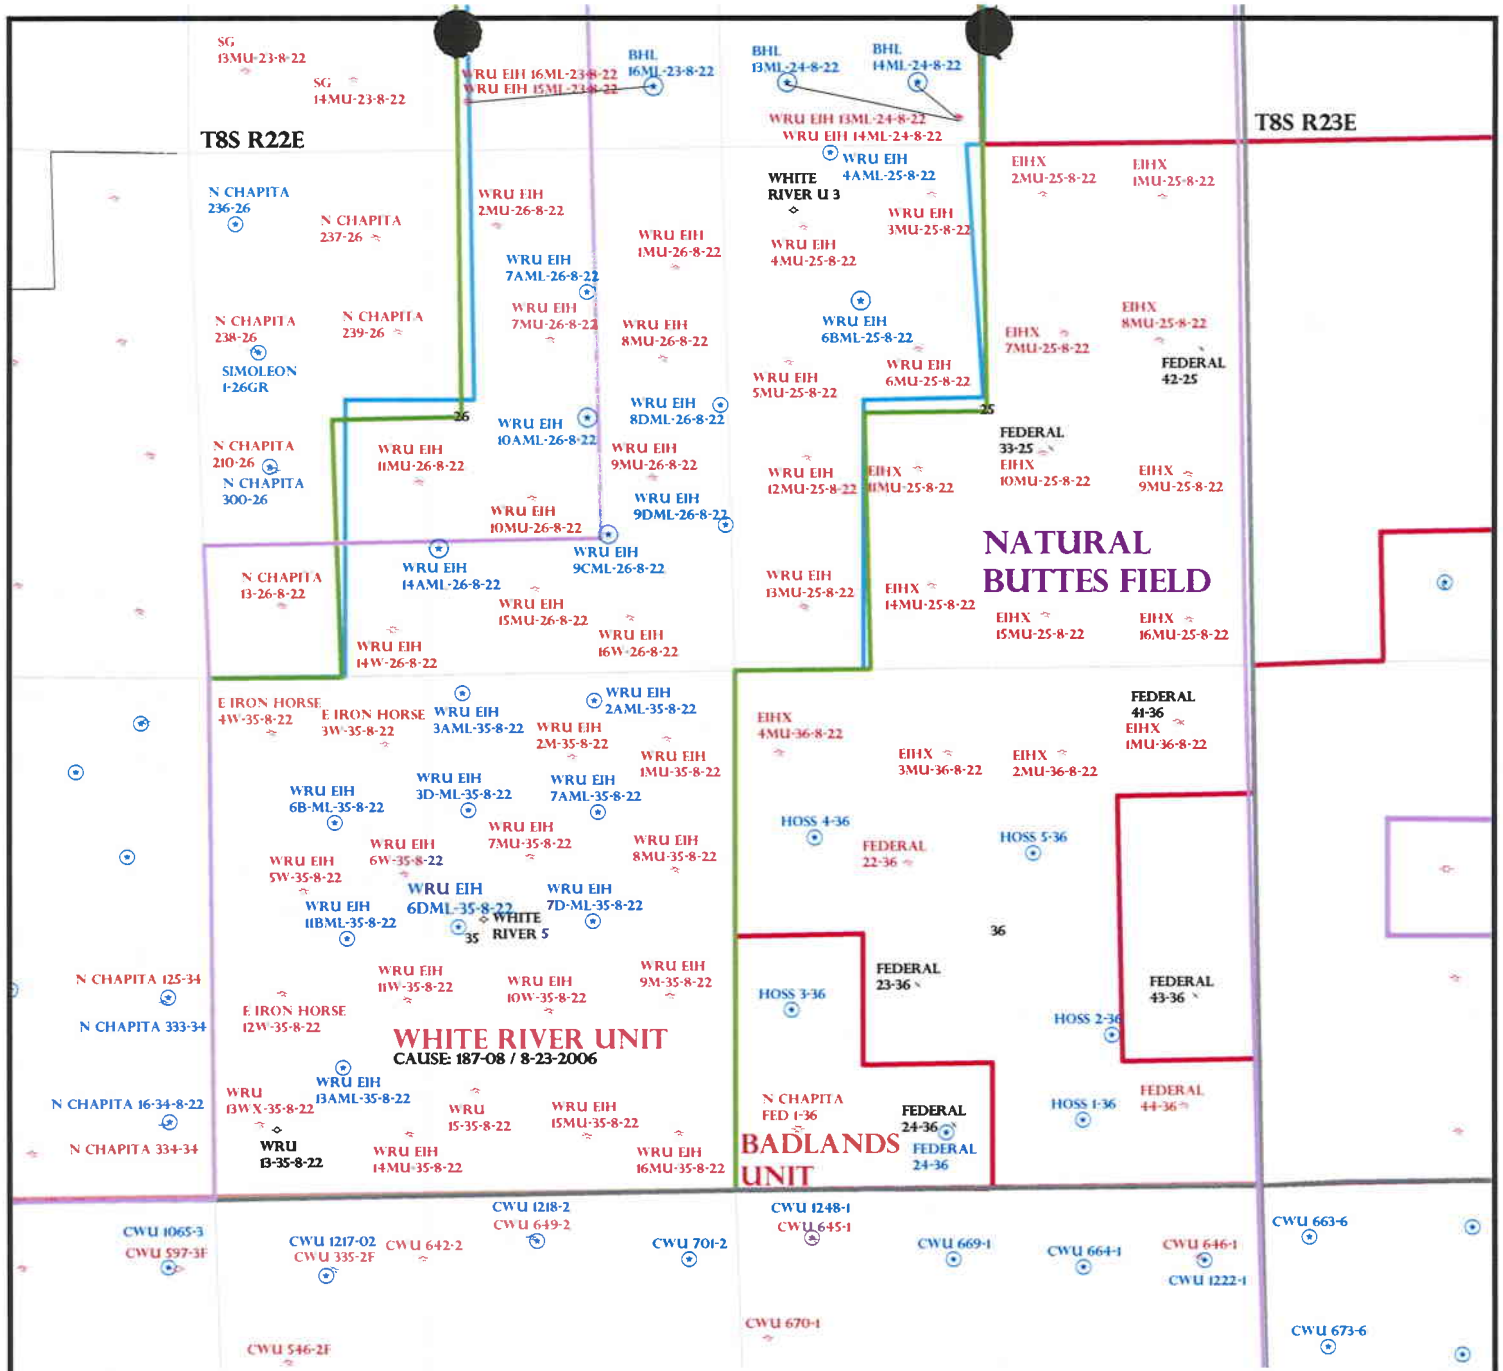

OPERATOR: QEP UINTAH BASIN (N2460)

SEC: 25,26,35 T.8S R. 22E

FIELD: NATURAL BUTTES (630)

COUNTY: UINTAH

CAUSE: 187-08 / 8-23-2006



PREPARED BY: DIANA WHITNEY
DATE: 22-SEPTEMBER-2006

United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, Utah 84145-0155

IN REPLY REFER TO:
3160
(UT-922)

September 25, 2006

Memorandum

To: Assistant District Manager Minerals, Vernal District

From: Michael Coulthard, Petroleum Engineer

Subject: 2006 Plan of Development White River Unit, Uintah County, Utah.

Pursuant to email between Diana Whitney, Division of Oil, Gas and Mining, and Mickey Coulthard, Utah State Office, Bureau of Land Management, the following wells are planned for calendar year 2006 within the White River Unit, Uintah County, Utah.

API#	WELL NAME	LOCATION
(Proposed PZ MesaVerde)		
43-047-38649	WRU EIH 09CML-26-8-22	Sec 26 T08S R22E 1408 FSL 1226 FEL
43-047-38647	WRU EIH 10AML-26-8-22	Sec 26 T08S R22E 2588 FSL 1406 FEL
43-047-38648	WRU EIH 14AML-26-8-22	Sec 26 T08S R22E 1274 FSL 2375 FWL
43-047-38637	WRU EIH 07AML-26-8-22	Sec 26 T08S R22E 1410 FNL 1381 FEL
43-047-38638	WRU EIH 08DML-26-8-22	Sec 26 T08S R22E 2563 FNL 0061 FEL
43-047-38639	WRU EIH 09DML-26-8-22	Sec 26 T08S R22E 1492 FSL 0038 FEL
43-047-38650	WRU EIH 06BML-25-8-22	Sec 25 T08S R22E 1531 FNL 1387 FWL
43-047-38636	WRU EIH 04AML-25-8-22	Sec 25 T08S R22E 0030 FNL 1120 FWL
43-047-38640	WRU EIH 06DML-35-8-22	Sec 35 T08S R22E 2551 FNL 2492 FWL
43-047-38641	WRU EIH 07AML-35-8-22	Sec 35 T08S R22E 1409 FNL 1378 FEL
43-047-38642	WRU EIH 13AML-35-8-22	Sec 35 T08S R22E 1311 FSL 1308 FWL
43-047-38643	WRU EIH 02AML-35-8-22	Sec 35 T08S R22E 0280 FNL 1413 FEL
43-047-38644	WRU EIH 03AML-35-8-22	Sec 35 T08S R22E 0191 FNL 2555 FWL
43-047-38651	WRU EIH 09CML-23-8-22	Sec 23 T08S R22E 1560 FSL 1298 FEL
	BHL	Sec 23 T08S R22E 1317 FSL 1342 FEL

This office has no objection to permitting the wells at this time.

/s/ Michael L. Coulthard

bcc: File - White River Unit
Division of Oil Gas and Mining
Central Files
Agr. Sec. Chron



State of Utah

Department of Natural Resources

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas & Mining

JOHN R. BAZA
Division Director

JON M. HUMPHMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

September 25, 2006

QEP Uinta Basin, Inc.
11002 E 17500 S
Vernal, UT 84078


Re: WRU EIH 3AML-35-8-22 Well, 191' FNL, 2555' FWL, NE NW, Sec. 35,
T. 8 South, R. 22 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-38644.

Sincerely,


for Gil Hunt
Associate Director

pab
Enclosures

cc: Uintah County Assessor
Bureau of Land Management, Vernal District Office

Operator: QEP Uinta Basin, Inc.
Well Name & Number WRU EIH 3AML-35-8-22
API Number: 43-047-38644
Lease: UTU-01089

Location: NE NW **Sec.** 35 **T.** 8 South **R.** 22 East

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dan Jarvis at (801) 538-5338 .

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

Division of Oil, Gas and Mining
OPERATOR CHANGE WORKSHEET

ROUTING

1. DJJ
2. CDW

Change of Operator (Well Sold)

X - Operator Name Change/Merger

The operator of the well(s) listed below has changed, effective:

1/1/2007

FROM: (Old Operator):

N2460-QEP Uinta Basin, Inc.
 1050 17th St, Suite 500
 Denver, CO 80265

Phone: 1 (303) 672-6900

TO: (New Operator):

N5085-Questar E&P Company
 1050 17th St, Suite 500
 Denver, CO 80265

Phone: 1 (303) 672-6900

CA No.				Unit:		WHITE RIVER UNIT		
WELL NAME		SEC TWN RNG		API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS
SEE ATTACHED LISTS					*			

OPERATOR CHANGES DOCUMENTATION

Enter date after each listed item is completed

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 4/19/2007
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 4/16/2007
- The new company was checked on the **Department of Commerce, Division of Corporations Database** on: 1/31/2005
- a. Is the new operator registered in the State of Utah: Business Number: 764611-0143
- a. (R649-9-2)Waste Management Plan has been received on: IN PLACE
- b. Inspections of LA PA state/fee well sites complete on: n/a
- c. Reports current for Production/Disposition & Sundries on: n/a
- Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM 4/23/2007 BIA
- Federal and Indian Units:**
The BLM or BIA has approved the successor of unit operator for wells listed on: 4/23/2007
- Federal and Indian Communization Agreements ("CA"):**
The BLM or BIA has approved the operator for all wells listed within a CA on: _____
- Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: _____

DATA ENTRY:

- Changes entered in the **Oil and Gas Database** on: 4/30/2007 and 5/15/2007
- Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 4/30/2007 and 5/15/2007
- Bond information entered in RBDMS on: 4/30/2007 and 5/15/2007
- Fee/State wells attached to bond in RBDMS on: 4/30/2007 and 5/15/2007
- Injection Projects to new operator in RBDMS on: 4/30/2007 and 5/15/2007
- Receipt of Acceptance of Drilling Procedures for APD/New on: n/a

BOND VERIFICATION:

- Federal well(s) covered by Bond Number: ESB000024
- Indian well(s) covered by Bond Number: 799446
- a. (R649-3-1) The **NEW** operator of any state/fee well(s) listed covered by Bond Number 965003033
- b. The **FORMER** operator has requested a release of liability from their bond on: n/a

LEASE INTEREST OWNER NOTIFICATION:

- (R649-2-10) The **NEW** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: n/a

COMMENTS: THIS IS A COMPANY NAME CHANGE.

SOME WELL NAMES HAVE BEEN CHANGED AS REQUESTED

QEP Uinta Basin (N2460) to QUESTAR E and P (N5085)
WHITE RIVER UNIT

4/30/2007 and 5/15/2007

Original Well Name	Well Name & No.	Q/Q	SEC	TWP	RNG	API	Entity	Lease	Well Type	Status
WHITE RIVER 31-4	WR 31-4	SWSE	04	080S	220E	4304715090	4915	Federal	WS	A
WRU 15-35-8-22	WRU EIH 15-35-8-22	SWSE	35	080S	220E	4304733061	12528	Federal	GW	P
E IRON HORSE 12W-35-8-22	WRU EIH 12W-35-8-22	NWSW	35	080S	220E	4304733393	12528	Federal	GW	P
WRU 13W-3-8-22	WR 13W-3-8-22	SWSW	03	080S	220E	4304733651	13544	Federal	GW	P
GB 6W-9-8-22	OU GB 6W-9-8-22	SENW	09	080S	220E	4304734010	13545	Federal	GW	P
E IRON HORSE 4W-35-8-22	WRU EIH 4W-35-8-22	NWNW	35	080S	220E	4304734042	12528	Federal	GW	P
E IRON HORSE 3W-35-8-22		NENW	35	080S	220E	4304734044	12528	Federal	GW	P
GB 4W-9-8-22	WRU GB 4WRG-9-8-22	NWNW	09	080S	220E	4304734208	4915	Federal	GW	DRL
WRU 13WX-35-8-22	WRU EIH 13WX-35-8-22	SWSW	35	080S	220E	4304734210	12528	Federal	GW	P
WRU EIH 5W-35-8-22	WRU EIH 5W-35-8-22	SWNW	35	080S	220E	4304734572	12528	Federal	GW	P
OU GB 14W-9-8-22	OU GB 14W-9-8-22	SESW	09	080S	220E	4304734649	13545	Federal	GW	P
WRU GB 9MU-9-8-22	WRU GB 9MU-9-8-22	NESE	09	080S	220E	4304734650	13545	Federal	GW	P
OU GB 10W-9-8-22	OU GB 10W-9-8-22	NWSE	09	080S	220E	4304734651	13545	Federal	GW	P
OU GB 12W-9-8-22	OU GB 12W-9-8-22	NWSW	09	080S	220E	4304734652	13712	Federal	GW	S
OU GB 15W-9-8-22	OU GB 15W-9-8-22	SWSE	09	080S	220E	4304734678	13545	Federal	GW	P
OU GB 16W-9-8-22	OU GB 16W-9-8-22	SESE	09	080S	220E	4304734679	13545	Federal	GW	P
WRU EIH 6W-35-8-22	WRU EIH 6W-35-8-22	SENW	35	080S	220E	4304734684	12528	Federal	GW	P
GB 11ML-10-8-22	GB 11ML-10-8-22	NESW	10	080S	220E	4304734691	14818	Federal	GW	P
WRU EIH 11W-35-8-22	WRU EIH 11W-35-8-22	NESW	35	080S	220E	4304734708	12528	Federal	GW	P
WRU GB 5M-9-8-22	WRU GB 5M-9-8-22	SWNW	09	080S	220E	4304734753	13545	Federal	GW	P
OU GB 12W-4-8-22	OU GB 12W-4-8-22	NWSW	04	080S	220E	4304734762	13718	Federal	GW	P
OU GB 12M-10-8-22	OU GB 12M-10-8-22	NWSW	10	080S	220E	4304734769	13864	Federal	GW	P
WRU EIH 14W-26-8-22	WRU EIH 14W-26-8-22	SESW	26	080S	220E	4304734835	12528	Federal	GW	S
WRU EIH 11MU-26-8-22	WRU EIH 11MU-26-8-22	NESW	26	080S	220E	4304734836	12528	Federal	GW	P
WRU EIH 10W-35-8-22	WRU EIH 10W-35-8-22	NWSE	35	080S	220E	4304735046	12528	Federal	GW	P
WRU EIH 9MU-26-8-22	WRU EIH 9MU-26-8-22	NESE	26	080S	220E	4304735047	14003	Federal	GW	P
WRU EIH 15MU-26-8-22	WRU EIH 15MU-26-8-22	SWSE	26	080S	220E	4304735048	12528	Federal	GW	P
WRU EIH 1MU-35-8-22	WRU EIH 1MU-35-8-22	NENE	35	080S	220E	4304735049	12528	Federal	GW	P
WRU EIH 9M-35-8-22	WRU EIH 9M-35-8-22	NESE	35	080S	220E	4304735050	12528	Federal	GW	P
WRU EIH 7MU-35-8-22	WRU EIH 7MU-35-8-22	SWNE	35	080S	220E	4304735051	12528	Federal	GW	P
WRU EIH 1MU-26-8-22	WRU EIH 1MU-26-8-22	NENE	26	080S	220E	4304735118	12528	Federal	GW	P
WRU EIH 7MU-26-8-22	WRU EIH 7MU-26-8-22	SENE	26	080S	220E	4304735119	12528	Federal	GW	P
WRU EIH 10MU-26-8-22	WRU EIH 10MU-26-8-22	NWSE	26	080S	220E	4304735120	12528	Federal	GW	P
WRU EIH 15MU-35-8-22	WRU EIH 15MU-35-8-22	SWSE	35	080S	220E	4304735121	12528	Federal	GW	P
WRU EIH 10ML-23-8-22	WRU EIH 10ML-23-8-22	NWSE	23	080S	220E	4304735187	12528	Federal	GW	P
SG 12MU-23-8-22	SG 12MU-23-8-22	NWSW	23	080S	220E	4304735188	12528	Federal	GW	P
WRU EIH 9ML-23-8-22	WRU EIH 9ML-23-8-22	NESE	23	080S	220E	4304735189	12528	Federal	GW	P
WRU EIH 16MU-26-8-22	WRU EIH 16MU-26-8-22	SESE	26	080S	220E	4304735191	12528	Federal	GW	P
WRU EIH 2MU-26-8-22	WRU EIH 2MU-26-8-22	NWNE	26	080S	220E	4304735192	12528	Federal	GW	P
WRU EIH 8MU-26-8-22	WRU EIH 8MU-26-8-22	SENE	26	080S	220E	4304735193	12528	Federal	GW	P
WRU EIH 16MU-35-8-22	WRU EIH 16MU-35-8-22	SESE	35	080S	220E	4304735194	12528	Federal	GW	P

QEP Uinta Basin (N2460) to QUESTAR E and P (N5085)
WHITE RIVER UNIT

4/30/2007 and 5/15/2007

Original Well Name	Well Name & No.	Q/Q	SEC	TWP	RNG	API	Entity	Lease	Well Type	Status
WRU EIH 8MU-35-8-22	WRU EIH 8MU-35-8-22	SENE	35	080S	220E	4304735195	12528	Federal	GW	P
WRU EIH 13MU-25-8-22	WRU EIH 13MU-25-8-22	SWSW	25	080S	220E	4304735329	12528	Federal	GW	P
WRU EIH 15ML-23-8-22	WRU EIH 15ML-23-8-22	SWSE	23	080S	220E	4304735387	12528	Federal	GW	P
WRU EIH 4MU-25-8-22	WRU EIH 4MU-25-8-22	NWNW	25	080S	220E	4304735388	12528	Federal	GW	P
WRU EIH 3MU-25-8-22	EIH 3MU-25-8-22	NENW	25	080S	220E	4304735389	12528	Federal	GW	P
WRU EIH 12ML-24-8-22	WRU EIH 12ML-24-8-22	NWSW	24	080S	220E	4304735425	12528	Federal	GW	P
WRU EIH 14ML-24-8-22	WRU EIH 14ML-24-8-22	SESW	24	080S	220E	4304735426	12528	Federal	GW	P
WRU EIH 6MU-25-8-22	WRU EIH 6MU-25-8-22	SENW	25	080S	220E	4304735431	12528	Federal	GW	P
WRU EIH 5MU-25-8-22	WRU EIH 5MU-25-8-22	SWNW	25	080S	220E	4304735432	12528	Federal	GW	P
WRU EIH 12MU-25-8-22	WRU EIH 12MU-25-8-22	NWSW	25	080S	220E	4304735601	12528	Federal	GW	P
WRU EIH 14MU-35-8-22	WRU EIH 14MU-35-8-22	SESW	35	080S	220E	4304735667	12528	Federal	GW	P
WRU EIH 13ML-24-8-22	WRU EIH 13ML-24-8-22	SESW	24	080S	220E	4304735793	12528	Federal	GW	P
WRU EIH 16ML-23-8-22	WRU EIH 16ML-23-8-22	SWSE	23	080S	220E	4304735804	12528	Federal	GW	P
WRU EIH 11ML-24-8-22	WRU EIH 11ML-24-8-22	NWSW	24	080S	220E	4304735805	12528	Federal	GW	P
WRU EIH 6B-ML-35-8-22	WRU EIH 6B-ML-35-8-22	SWNW	35	080S	220E	4304737299	12528	Federal	GW	P
WRU EIH 6B-ML-35-8-20	WRU EIH 6B-ML-35-8-21	SWNW	35	080S	220E	4304737299	15281 12528	Federal	GW	S
WRU EIH 11BML-35-8-22	WRU EIH 11BML-35-8-22	NESW	35	080S	220E	4304737300	12528	Federal	GW	P
WRU EIH 3D-ML-35-8-22	WRU EIH 3D-ML-35-8-22	SENW	35	080S	220E	4304737465	12528	Federal	GW	P
WRU EIH 7D-ML-35-8-22	WRU EIH 7D-ML-35-8-22	SWNE	35	080S	220E	4304737466	12528	Federal	GW	P
WRU EIH 4AML-25-8-22	WRU EIH 4AD-25-8-22	NWNW	25	080S	220E	4304738636		Federal	GW	APD
WRU EIH 7AML-26-8-22	WRU EIH 7AD-26-8-22	SWNE	26	080S	220E	4304738637		Federal	GW	APD
WRU EIH 8DML-26-8-22	WRU EIH 8DML-26-8-22	SENE	26	080S	220E	4304738638		Federal	GW	APD
WRU EIH 9DML-26-8-22	WRU EIH 9DML-26-8-22	NESE	26	080S	220E	4304738639		Federal	GW	APD
WRU EIH 6DML-35-8-22	WRU EIH 6DD-35-8-22	SENW	35	080S	220E	4304738640		Federal	GW	APD
WRU EIH 7AD-35-8-22	WRU EIH 7AD-35-8-22	SWNE	35	080S	220E	4304738641		Federal	GW	APD
WRU EIH 13AML-35-8-22	WRU EIH 14BD-35-8-22	SWSW	35	080S	220E	4304738642		Federal	GW	APD
WRU EIH 2AML-35-8-22	WRU EIH 2AML-35-8-22	NWNE	35	080S	220E	4304738643		Federal	GW	APD
WRU EIH 3AD-35-8-22	WRU EIH 3AD-35-8-22	NENW	35	080S	220E	4304738644		Federal	GW	APD
WRU EIH 10AML-26-8-22	WRU EIH 10AML-26-8-22	NWSE	26	080S	220E	4304738647		Federal	GW	APD
WRU EIH 14AML-26-8-22	WRU EIH 14AML-26-8-22	SESW	26	080S	220E	4304738648		Federal	GW	APD
WRU EIH 9CML-26-8-22	WRU EIH 9CD-26-8-22	NESE	26	080S	220E	4304738649		Federal	GW	APD
WRU EIH 6BML-25-8-22	WRU EIH 6BML-25-8-22	SENW	25	080S	220E	4304738650		Federal	GW	APD
WRU EIH 15AG-35-8-22	WRU EIH 15AG-35-8-22	SWSE	35	080S	220E	4304738772		Federal	OW	APD
WRU EIH 15AML-35-8-22	WRU EIH 15AD-35-8-22	SWSE	35	080S	220E	4304738773		Federal	GW	APD

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER _____	5. LEASE DESIGNATION AND SERIAL NUMBER: see attached
2. NAME OF OPERATOR: QUESTAR EXPLORATION AND PRODUCTION COMPANY	6. IF INDIAN, ALLOTTEE OR TRIBE NAME: see attached
3. ADDRESS OF OPERATOR: 1050 17th Street Suite 500 CITY Denver STATE CO ZIP 80265	7. UNIT or CA AGREEMENT NAME: see attached
4. LOCATION OF WELL FOOTAGES AT SURFACE: attached	8. WELL NAME and NUMBER: see attached
	9. API NUMBER: attached
	10. FIELD AND POOL, OR WILDCAT:

COUNTY: Uintah

QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:

STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: 1/1/2007	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion:	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: Operator Name Change
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Effective January 1, 2007 operator of record, QEP Uinta Basin, Inc., will hereafter be known as QUESTAR EXPLORATION AND PRODUCTION COMPANY. This name change involves only an internal corporate name change and no third party change of operator is involved. The same employees will continue to be responsible for operations of the properties described on the attached list. All operations will continue to be covered by bond numbers:

Federal Bond Number: 965002976 (BLM Reference No. ESB000024)

Utah State Bond Number: 965003033

Fee Land Bond Number: 965003033

Current operator of record, QEP UINTA BASIN, INC., hereby resigns as operator of the properties as described on the attached list.

Jay B. Neese, Executive Vice President, QEP Uinta Basin, Inc.

Successor operator of record, QUESTAR EXPLORATION AND PRODUCTION COMPANY, hereby assumes all rights, duties and obligations as operator of the properties as described on the attached list

Jay B. Neese, Executive Vice President
Questar Exploration and Production Company

NAME (PLEASE PRINT) Debra K. Stanberry	TITLE Supervisor, Regulatory Affairs
SIGNATURE 	DATE 3/16/2007

(This space for State use only)

RECEIVED

APR 19 2007

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL ☐ GAS WELL ☐ OTHER _____

2. NAME OF OPERATOR:
QUESTAR EXPLORATION AND PRODUCTION COMPANY

3. ADDRESS OF OPERATOR: 1050 17th Street Suite 500 Denver STATE CO ZIP 80265 PHONE NUMBER: (303) 308-3068

4. LOCATION OF WELL

FOOTAGES AT SURFACE: attached

COUNTY: Uintah

QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:

STATE: UTAH

5. LEASE DESIGNATION AND SERIAL NUMBER:
see attached

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
see attached

7. UNIT or CA AGREEMENT NAME:
see attached

8. WELL NAME and NUMBER:
see attached

9. API NUMBER:
attached

10. FIELD AND POOL, OR WILDCAT:

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: 1/1/2007	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion:	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: Well Name Changes
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

PER THE ATTACHED LIST OF WELLS, QUESTAR EXPLORATION AND PRODUCTION COMPANY REQUESTS THAT THE INDIVIDUAL WELL NAMES BE UPDATED IN YOUR RECORDS.

NAME (PLEASE PRINT) Debra K. Stanberry

TITLE Supervisor, Regulatory Affairs

SIGNATURE  DATE 4/17/2007

(This space for State use only)

RECEIVED

APR 19 2007

DIV. OF OIL, GAS & MINING



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, UT 84145-0155



IN REPLY REFER TO
3180
UT-922

April 23, 2007

Questar Exploration and Production Company
1050 17th Street, Suite 500
Denver, Colorado 80265

Re: White River Unit
Uintah County, Utah

Gentlemen:

On April 12, 2007, we received an indenture dated April 6, 2007, whereby QEP Uinta Basin, Inc. resigned as Unit Operator and Questar Exploration and Production Company was designated as Successor Unit Operator for the White River Unit, Uintah County, Utah.

This indenture was executed by all required parties and the signatory parties have complied with Sections 5 and 6 of the unit agreement. The instrument is hereby approved effective April 23, 2007.

In approving this designation, the Authorized Officer neither warrants nor certifies that the designated party has obtained all required approval that would entitle it to conduct operations under the White River Unit Agreement.

Your nationwide oil and gas bond No. ESB000024 will be used to cover all federal operations within the White River Unit.

It is requested that you notify all interested parties of the change in unit operator. Copies of the approved instruments are being distributed to the appropriate federal offices, with one copy returned herewith.

Sincerely,

/s/ Greg J. Noble

Greg J. Noble
Acting Chief, Branch of Fluid Minerals

Enclosure

bcc: Field Manager - Vernal (w/enclosure)
SITLA
Division of Oil, Gas & Mining
File - White River Unit (w/enclosure)
Agr. Sec. Chron
Reading File
Central Files

UT922:TAThompson:tt:4/23/07

RECEIVED

APR 30 2007

DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUBMIT IN TRIPLICATE*

FORM APPROVED
OMB NO. 1040-0136
Expires: February 28, 1995

APPLICATION FOR PERMIT TO DRILL OR DEEPEN

TYPE OF WORK

DRILL ☒DEEPEN ☐

TYPE OF WELL

☐☒☐SINGLE
ZONE ☒MULTIPLE
ZONE ☐

OIL WELL

GAS WELL

OTHER

2. NAME OF OPERATOR

QEP UINTA BASIN, INC.

Contact: Jan Nelson

E-Mail: jan.nelson@questar.com

3. ADDRESS

11002 E. 17500 S. Vernal, Ut 84078

Telephone number

Phone 435-781-4331 Fax 435-781-4323

4. LOCATION OF WELL (Report location clearly and in accordance with and State requirements*)

At Surface

191' FNL 2555' FWL NENW SECTION 35 T8S R22E

At proposed production zone

14. DISTANCE IN MILES FROM NEAREST TOWN OR POSTOFFICE*

25 +/- SOUTHEAST OF VERNAL, UTAH

15. DISTANCE FROM PROPOSED LOCATION TO NEAREST
PROPERTY OR LEASE LINE, FT.
(also to nearest drig, unit line if any)

191' +/-

18. DISTANCE FROM PROPOSED location to nearest well, drilling,
completed, applied for, on this lease, ft

1000' +/-

21. ELEVATIONS (Show whether DF, RT, GR, ect.)

4846.7' GR

24. Attachments

5. LEASE DESIGNATION AND SERIAL NO.

UTU-01089

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

N/A

7. UNIT AGREEMENT NAME

WHITE RIVER UNIT

8. FARM OR LEASE NAME, WELL NO.

WRU EIH 3AML-35-8-22

9. API NUMBER:

43' 047.38644

10. FIELD AND POOL, OR WILDCAT

WHITE RIVER

11. SEC., T, R, M, OR BLK & SURVEY OR AREA

SEC. 35, T8S, R22E Mer SLB

12. COUNTY OR PARISH

Uintah

13. STATE

UT

17. NO. OF ACRES ASSIGNED TO THIS WELL

20

16. NO. OF ACRES IN LEASE

640.00

19. PROPOSED DEPTH

10,000'

20. BLM/BIA Bond No. on file

ESB000024

23. Estimated duration

14 days

22. DATE WORK WILL START

ASAP

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

1. Well plat certified by a registered surveyor.

2. A Drilling Plan

3. A surface Use Plan (if location is on National Forest System Lands,
the SUPO shall be filed with the appropriate Forest Service Office).4. Bond to cover the operations unless covered by an existing bond on file (see
Item 20 above).

5. Operator certification.

6. Such other site specific information and/or plans as may be required by the
authorized officer.

SIGNED

Name (printed/typed) Jan Nelson

DATE 9-18-06

TITLE

Regulatory Affairs

(This space for Federal or State office use)

PERMIT NO.

APPROVAL DATE

RECEIVED

FEB 07 2007

CONDITIONS OF APPROVAL, IF ANY:

APPROVED BY

TITLE

Assistant Field Manager
Lands & Mineral Resources

DIV. OF OIL, GAS & MINING

DATE 1-29-2007

*See Instructions On Reverse Side

Title 18 U.S.C Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the

United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction

RECEIVED

SEP 20 2006

CONDITIONS OF APPROVAL ATTACHED
CONFIDENTIAL
NOTICE OF APPROVAL

BLM VERNAL, UTAH

06TT0238A

NOS 8/9/06



UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
VERNAL FIELD OFFICE

170 South 500 East

VERNAL, UT 84078

(435) 781-4400



CONDITIONS OF APPROVAL FOR APPLICATION FOR PERMIT TO DRILL

Company: QEP Uinta Basin, Inc.
Well No: WRU EIH 3AML-35-8-22
API No: 43-047-38644

Location: NENW, Sec 35 T8S, R22E
Lease No: UTU-01089
Agreement: White River Unit

Title	Name	Office Phone Number	Cell Phone Number
Petroleum Engineer:	Matt Baker	435-781-4490	435-828-4470
Petroleum Engineer:	Michael Lee	435-781-4432	435-828-7875
Petroleum Engineer:	James Ashley	435-781-4470	435-828-7874
Petroleum Engineer:	Ryan Angus	435-781-4430	
Supervisory Petroleum Technician:	Jamie Sparger	435-781-4502	435-828-3913
NRS/Enviro Scientist:	Paul Buhler	435-781-4475	435-828-4029
NRS/Enviro Scientist:	Karl Wright	435-781-4484	
NRS/Enviro Scientist:	Holly Villa	435-781-4404	
NRS/Enviro Scientist:	Melissa Hawk	435-781-4476	435-828-7381
NRS/Enviro Scientist:	Chuck MacDonald	435-781-4441	
NRS/Enviro Scientist:	Jannice Cutler	435-781-3400	
NRS/Enviro Scientist:	Michael Cutler	435-781-3401	
NRS/Enviro Scientist:	Anna Figueroa	435-781-3407	
NRS/Enviro Scientist:	Verlyn Pindell	435-781-3402	
NRS/Enviro Scientist:	Darren Williams	435-781-4447	
NRS/Enviro Scientist:	Nathan Packer	435-781-3405	
After Hours Contact Number: 435-781-4513		Fax: 435-781-4410	

**A COPY OF THESE CONDITIONS SHALL BE FURNISHED TO YOUR
FIELD REPRESENTATIVE TO INSURE COMPLIANCE**

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (43 CFR Part 3160), and this approved Application for Permit to Drill including Surface and Downhole Conditions of Approval. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling, and completion operations. **This permit is approved for a one-year period. An additional year extension may be applied for by sundry notice prior to expiration.**

NOTIFICATION REQUIREMENTS

Location Construction (Notify NRS/Enviro Scientist)	-	Forty-Eight (48) hours prior to construction of location and access roads.
Location Completion (Notify NRS/Enviro Scientist)	-	Prior to moving on the drilling rig.
Spud Notice (Notify Petroleum Engineer)	-	Twenty-Four (24) hours prior to spudding the well.
Casing String & Cementing (Notify Supervisory Petroleum Technician)	-	Twenty-Four (24) hours prior to running casing and cementing all casing strings
BOP & Related Equipment Tests (Notify Supervisory Petroleum Technician)	-	Twenty-Four (24) hours prior to initiating pressure tests
First Production Notice (Notify Petroleum Engineer)	-	Within Five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days

***SURFACE USE PROGRAM
CONDITIONS OF APPROVAL (COAs)***

Conditions for Approval are in the APD or SOP

- The buried pipeline exception request has been received. It has been determined that the pipeline route has bedrock exposed at the surface. The exception is granted for a surface pipeline.

General Surface COA

Operator shall notify any active Gilsonite mining operation within 2 miles of the location 48 hours prior to any blasting during construction for this well.

DOWNHOLE CONDITIONS OF APPROVAL

All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to. The following items are emphasized:

SITE SPECIFIC DOWNHOLE CONDITIONS OF APPROVAL

- An approved Sundry Notice is required before adding any oil to the drilling mud.
- A formation integrity test shall be performed at the surface casing shoe.
- A Cement Bond Log (CBL) shall be run in the production casing from the TD to the top of cement. A field copy of the CBL shall be submitted to the BLM Vernal Field Office for review.

DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS

- There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well. Any changes in operation must have prior approval from the BLM, Vernal Field Office Petroleum Engineers.
- The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.
- **Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least 24 hours in advance of casing cementing operations and BOPE & casing pressure tests.**
- Blowout prevention equipment (BOPE) shall remain in use until the well is completed or abandoned. Closing unit controls shall remain unobstructed and readily accessible at all times. Choke manifolds shall be located outside of the rig substructure.
- All BOPE components shall be inspected daily and those inspections shall be recorded in the daily drilling report. Components shall be operated and tested as required by Onshore Oil & Gas Order No. 2 to insure good mechanical working order. All BOPE pressure tests shall be performed by a test pump with a chart recorder and **NOT** by the rig pumps. Test shall be reported in the driller's log.
- BOP drills shall be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.
- Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.
- No aggressive/fresh hard-banded drill pipe shall be used within casing.
- **Cement baskets shall not be run on surface casing.**

- The lessee/operator must report all shows of water or water-bearing sands to the BLM. If flowing water is encountered it must be sampled and analyzed (a copy of the analyses to be submitted to the BLM Field Office in Vernal, Utah).
- All oil and gas shows shall be adequately tested for commercial possibilities, reported, and protected.
- The lessee/operator must report encounters of all non oil & gas mineral resources (such as Gilsonite, tar sands, oil shale, etc.) to Peter Sokolosky or another geologist of the Vernal Field Office, in writing, within 5 working days of each encounter. Each report shall include the well name/number, well location, date and depth (from KB or GL) of encounter, vertical footage of the encounter and, the name of the person making the report (along with a telephone number) should the BLM need to obtain additional information.
- All shows of fresh water and minerals shall be reported and protected. A sample shall be taken of any water flows and a water analysis furnished the BLM, Vernal Field Office. All oil and gas shows shall be adequately tested for commercial possibilities, reported, and protected.
- No location shall be constructed or moved, no well shall be plugged, and no drilling or workover equipment shall be removed from a well to be placed in a suspended status without prior approval of the BLM, Vernal Field Office. If operations are to be suspended for more than 30 days, prior approval of the BLM, Vernal Field Office shall be obtained and notification given before resumption of operations.
- Chronologic drilling progress reports shall be filed directly with the BLM, Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.
- Any change in the program shall be approved by the BLM, Vernal Field Office. "Sundry Notices and Reports on Wells" (Form BLM 3160-5) shall be filed for all changes of plans and other operations in accordance with 43 CFR 3162.3-2.
- Emergency approval may be obtained orally, but such approval does not waive the written report requirement. Any additional construction, reconstruction, or alterations of facilities, including roads, gathering lines, batteries, etc., which will result in the disturbance of new ground, shall require the filing of a suitable plan pursuant to Onshore Oil & Gas Order No. 1 of 43 CFR 3164.1 and prior approval by the BLM, Vernal Field Office.
- In accordance with 43 CFR 3162.4-3, this well shall be reported on the "Monthly Report of Operations" (Oil and Gas Operations Report ((OGOR)) starting with the month in which operations commence and continue each month until the well is physically plugged and abandoned. This report shall be filed in duplicate, directly with the Minerals Management Service, P.O. Box 17110, Denver, Colorado 80217-0110, or call 1-800-525-7922 (303) 231-3650 for reporting information.
- Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) shall be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, shall be filed on BLM Form 3160-4. Submit with the well completion report a geologic report including,

at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs, core data, drill stem test data, and results of production tests if performed. Samples (cuttings, fluid, and/or gas) shall be submitted only when requested by the BLM, Vernal Field Office.

- A cement bond log (CBL) will be run from the production casing shoe to the surface casing shoe and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.
- **Please submit an electronic copy of all other logs run on this well in LAS format to UT_VN_Welllogs@BLM.gov. This submission will supersede the requirement for submittal of paper logs to the BLM.**
- All off-lease storage, off-lease measurement, or commingling on-lease or off-lease shall have prior written approval from the BLM, Vernal Field Office.
- All measurement points shall be identified as point of sales or allocation for royalty determination prior to the installation of facilities.
- Oil and gas meters shall be calibrated in place prior to any deliveries. The Field Office Petroleum Engineers will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports shall be submitted to the BLM, Vernal Field Office. All measurement facilities will conform to the API standards for liquid hydrocarbons and the AGA standards for natural gas measurement.
- A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to the BLM, Vernal Field Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with Onshore Oil & Gas Order No. 3.
- This APD is approved subject to the requirement that, shall the well be successfully completed for production, the BLM, Vernal Field office must be notified when it is placed in a producing status. Such notification will be by written communication and must be received in this office by not later than the fifth business day following the date on which the well is placed on production. The notification shall provide, as a minimum, the following informational items:
 - Operator name, address, and telephone number.
 - Well name and number.
 - Well location (¼¼, Sec., Twn, Rng, and P.M.).
 - Date well was placed in a producing status (date of first production for which royalty will be paid).
 - The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
 - The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.
 - Unit agreement and / or participating area name and number, if applicable.
 - Communitization agreement number, if applicable.
- Any venting or flaring of gas shall be done in accordance with Notice to Lessees (NTL) 4A and needs prior approval from Field Office Petroleum Engineers.

- All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events as defined in NTL3A, shall be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production.
- Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.
- Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in order that a representative may witness plugging operations. If a well is suspended or abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of the well bore, showing location of plugs, amount of cement in each, and amount of casing left in hole, and the current status of the surface restoration.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

FORM APPROVED
OMB No. 1004-0135
Expires July 31, 1996

5. Lease Serial No.

UTU-01089

6. If Indian, Allottee or Tribe Name

N/A

7. If Unit or CA/Agreement, Name and/or No.

WHITE RIVER UNIT

8. Well Name and No.

WRU EIH 3AML-35-8-22

9. API Well No.

43-047-38644

10. Field and Pool, or Exploratory Area

WHITE RIVER

11. County or Parish, State

UINTAH

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

QEP Uinta Basin, Inc.

Contact: Jim Davidson

3a. Address

1571 East 1700 South, Vernal, UT 84078

3b. Phone No. (include area code)

303-308-3090

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

191' FNL 2555' FWL NENW SECTION 35, T8S, R22E

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input checked="" type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal
			<input type="checkbox"/> Water Shut-Off
			<input type="checkbox"/> Well Integrity
			<input type="checkbox"/> Other

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once Testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

QEP Uinta Basin, Inc. proposes to drill this well to the Dakota formation. The proposed TD was 10,000' the new proposed TD will be 15,800'. Please refer to attached drilling plan.

QEP Uinta Basin, Inc. proposes to change the well from EIH 3AML-35-8-22 to WRU EIH 3AD-35-8-22.

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 02-07-2007

By: [Signature]

FEB 06 2007

DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

Jan Nelson

Signature

Title

Regulatory Affairs

Date

February 2, 2007

Approved by

Title

Date

COPY SENT TO OPERATOR

Date

Initials

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

CONFIDENTIAL

DRILLING PROGRAM

ONSHORE OIL & GAS ORDER NO. 1
Approval of Operations on Onshore
Federal Oil and Gas Leases

All lease and/or unit operations will be conducted in such a manner that full compliance is made with applicable laws, regulations (43 CFR 3100), Onshore Oil and Gas No. 1, and the approved plan of operations. The operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished the field representative to insure compliance.

1. **Formation Tops**

The estimated tops of important geologic markers are as follows:

<u>Formation</u>	<u>Depth</u>
Uinta	Surface
Green River	2,231'
Wasatch	5,253'
Mesaverde	7,676'
Sego	10,047'
Castlegate	10,226'
Blackhawk	10,570'
Mancos Shale	11,005'
Mancos B	11,421'
Frontier	14,068'
Dakota Silt	14,984'
Dakota	15,261'
TD	15,800'

2. **Anticipated Depths of Oil Gas Water and Other Mineral Bearing Zones**

The estimated depths at which the top and bottom of the anticipated water, oil, gas. Or other mineral bearing formations are expected to be encountered are as follows:

<u>Substance</u>	<u>Formation</u>	<u>Depth</u>
Gas	Wasatch	5,253'
Gas	Mesaverde	7,676'
Gas	Blackhawk	10,570'
Gas	Mancos Shale	11,005'
Gas	Mancos B	11,421'
Gas	Dakota	15,261'

All fresh water and prospectively valuable minerals encountered during drilling, will be recorded by depth and adequately protected. All oil and gas shows will be tested to determine commercial potential.

DRILLING PROGRAM

All water shows and water-bearing sands will be reported to the BLM in Vernal, Utah. Copies of State of Utah form OGC-8-X are acceptable. If flows are detected, samples will be submitted to the BLM along with any water analyses conducted. Fresh water will be obtained from Wonsits Valley water right # A36125 (which was filed on May 7, 1964,) or Red Wash water right # 49-2153 (which was filed on March 25, 1960). It was determined by the Fish and Wildlife Service that any water right number filed before 1989 is not depleting to the Upper Colorado River System, to supply fresh water for drilling purposes. All water resulting from drilling operations will be disposed of at Red Wash Central Battery Disposal Site; SWSE, Section 27, T7S, R23E or Wonsits Valley Disposal Site; SWNW, Section 12, T8S, R21E.

3. **Operator's Specification for Pressure Control Equipment:**

- A. 13-5/8" 5000 psi double gate, 5,000 psi annular BOP (schematic included) from surface hole to 9-5/8" casing point.
- B. 11" 10,000 psi double gate, 10,000 psi single gate, 10,000 psi annular BOP (schematic included) from 9-5/8" casing point to total depth.
- C. Functional test daily
- D. All casing strings shall be pressure tested (0.2 psi/foot or 1500 psi, whichever is greater) prior to drilling the plug after cementing; test pressure shall not exceed the internal yield pressure of the casing.
- E. Ram type preventers and associated equipment shall be tested to approved stack working pressure if isolated by test plug or to 50 percent of internal yield pressure of casing whichever is less. BOP and related equipment shall meet the minimum requirements of Onshore Oil and Gas Order No. 2 for equipment and testing requirements, procedures, etc..., for a 10M system and individual components shall be operable as designed.

4. **Casing Design:**

Hole Size	Csg. Size	Top (MD)	Bottom (MD)	Wt.	Grade	Thread	Cond.
26"	20"	sfc	40-60'	Steel	Cond.	None	Used

DRILLING PROGRAM

17-1/2"	13-3/8	sfc	500'	54.5	K-55	STC	New
12-1/4"	9-5/8"	sfc	8000'	47	HCP-110	LTC	New
8-1/2"	7"	7700'	9000'	26	HCP-110	LTC	New
8-1/2"	7"	7700'	11,500'	29* SDrift	HCP-110	LTC	New
6-1/8"	4-1/2"	sfc	13,700'	15.1	P-110	LTC	New
6-1/8"	4-1/2"	13,700'	15,800'	15.1	Q-125	LTC	New

Casing Strengths:				Collapse	Burst	Tensile (minimum)
13-3/8"	54.5 lb.	K-55	STC	1,130 psi	2,730 psi	547,000 lb.
9-5/8"	47 lb.	HCP-110	LTC	7,100 psi	9,440 psi	1,213,000 lb.
7"	26 lb.	HCP-110	LTC	7,800 psi	9,950 psi	693,000 lb.
7"	29 lb.*	HCP-110	LTC	9,200 psi	11,220 psi	797,000 lb.
4-1/2"	15.1 lb.	P-110	LTC	14,350 psi	14,420 psi	406,000 lb.
4-1/2"	15.1 lb.	Q-125	LTC	15,840 psi	16,380 psi	438,000 lb.

* Special Drift

MINIMUM DESIGN FACTORS:

COLLAPSE: 1.125

BURST: 1.10

TENSION: 1.80

Area Fracture Gradient: 0.9 psi/foot

Maximum anticipated mud weight: 15.4 ppg

Maximum surface treating pressure: 12,500 psi

5. Auxiliary Equipment

- A. Kelly Cock – yes
- B. Float at the bit – yes
- C. Monitoring equipment on the mud system – visually and/or PVT/Flow Show

DRILLING PROGRAM

- D. Full opening safety valve on the rig floor – yes
- E. Rotating Head – yes
If drilling with air the following will be used:
- F. The blooie line shall be at least 6” in diameter and extend at least 100’ from the well bore into the reserve/blooie pit.
- G. Blooie line ignition shall be provided by a continuous pilot (ignited when drilling below 500’).
- H. Compressor shall be tied directly to the blooie line through a manifold.
- I. A mister with a continuous stream of water shall be installed near the end of the blooie lines for dust suppression.

Surface hole will be drilled with air, air/mist, foam, or mud depending on hole conditions. Drilling below surface casing will be with water based drilling fluids consisting primarily of fresh water, bentonite, lignite, caustic, lime, soda ash and polymers. No chromates will be used. It is not intended to use oil in the mud, however, in the event it is used, oil concentration will be less than 4% by volume. Maximum anticipated mud weight is 15.4 ppg.

No minimum quantity of weight material will be required to be kept on location.

PVT/Flow Show will be used from base of surface casing to TD.

Gas detector will be used from surface casing depth to TD.

6. **Testing, logging and coring program**

- A. Cores – none anticipated
- B. DST – none anticipated
- C. Logging – Mud logging – 4500’ to TD
GR-SP-Induction, Neutron Density, FMI
- D. Formation and Completion Interval: Mancos interval, final determination of completion will be made by analysis of logs.
Stimulation – Stimulation will be designed for the particular area of interest as encountered.

DRILLING PROGRAM

7. Cementing Program

20" Conductor:

Cement to surface with construction cement.

13-3/8" Surface Casing: sfc – 500' (MD)

Slurry: 0' – 500'. 610 sxs (731 cu ft) Premium cement + 0.25 lbs/sk Flocele + 2% CaCl₂
Slurry wt: 15.6 ppg, slurry yield: 1.20 ft³/sx, slurry volume: 17-1/2" hole + 100% excess.

9-5/8" Intermediate Casing: sfc - 8000' (MD)

Lead Slurry: 0' – 7,900'. 1880 sks (665 bbls) Foamed Lead 50/50 Poz cement + 0.1 % FDP-C766-05 (Low Fluid Loss Control) + 5 #/sx Silicate Compacted + 20 % SSA-1 + 0.1 % Versaset + 1.5 % Zonesealant 2000 (Foamer) Slurry wt: 14.3 ppg, (unfoamed) Slurry yield: 1.47 ft³/sk (unfoamed), Slurry volume: 12-1/4" hole + 35 % excess.

Tail Slurry: 7,900' – 8,000'. 160 sks (40.73 bbls) Tail 50/50 Poz cement + 0.1 % FDP-C766-05 (Low Fluid Loss Control) + 5 #/sx Silicate Compacted + 20 % SSA-1 + 0.1 % Versaset Slurry wt: 14.3 ppg, Slurry yield: 1.47 ft³/sk, Slurry volume: 12-1/4" hole + 35% excess.

7" Intermediate Casing: 7700 - 11,500' (MD)

Foamed Lead Slurry 2: 7,700' – 11,500'. 310 sks (1046 cu ft) 50/50 Poz Premium + 20% SSA-1 + 3 % silicalite compacted + 0.5% Halad 344 + 0.2% Halad 413 + 0.1% HR-12 + 0.7% Super CBL + 0.2% Suspend Slurry wt: 14.0 ppg,, Slurry yield: 1.59 ft³/sk, Slurry volume: 8-1/2" hole + 25% excess.

4-1/2" Production Casing: sfc - 15,800' (MD)


Lead/Tail Slurry: 3,500 - 15,800'. 2040 sks (1630 cu ft) Premium Cement + 17.5% SSA-1, + 4% Microbond HT, + 0.2% Halad 344 + 0.5% Halad 413, + 0.3% CFR-3, + 0.9% HR-12, + 0.2% Super CBL, + 0.2% Suspend HT, 17.5% SSA-2. Slurry wt: 16.2 ppg, Slurry yield: 1.49 ft³/sk, Slurry volume: 6-1/8" hole + 35% in open hole section.


*Final cement volumes to be calculated from caliper log with an attempt to be made to circulate cement to the surface on the intermediate string and 5,000' on the production string. A bond log will be run across the zone of interest and across zones as required by the authorized officer to insure protection of natural resources.

8. Anticipated Abnormal Pressures and Temperatures, Other Potential Hazards

No abnormal temperatures or pressures are anticipated. No H₂S has been encountered in or known to exist from previous wells drilled to similar depths in the general area. Maximum anticipated bottom hole pressure equals approximately 13,000 psi. Maximum anticipated bottom hole temperature is 320° F.

DRILLING PROGRAM

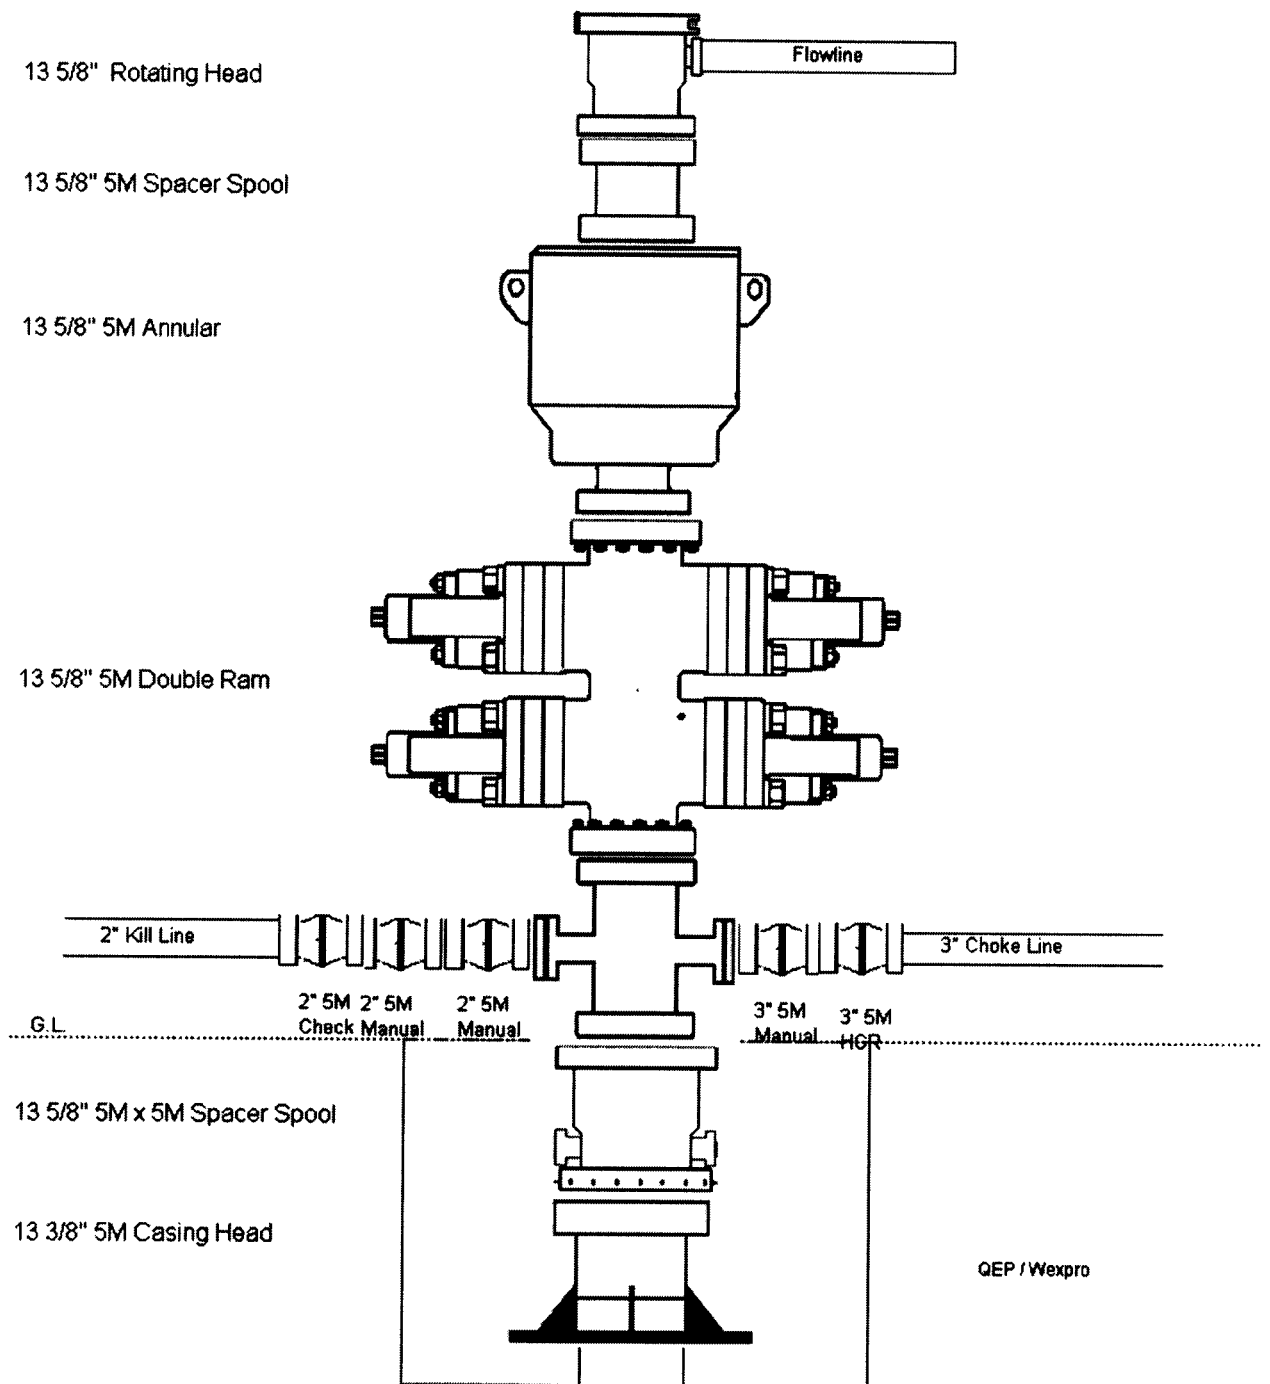

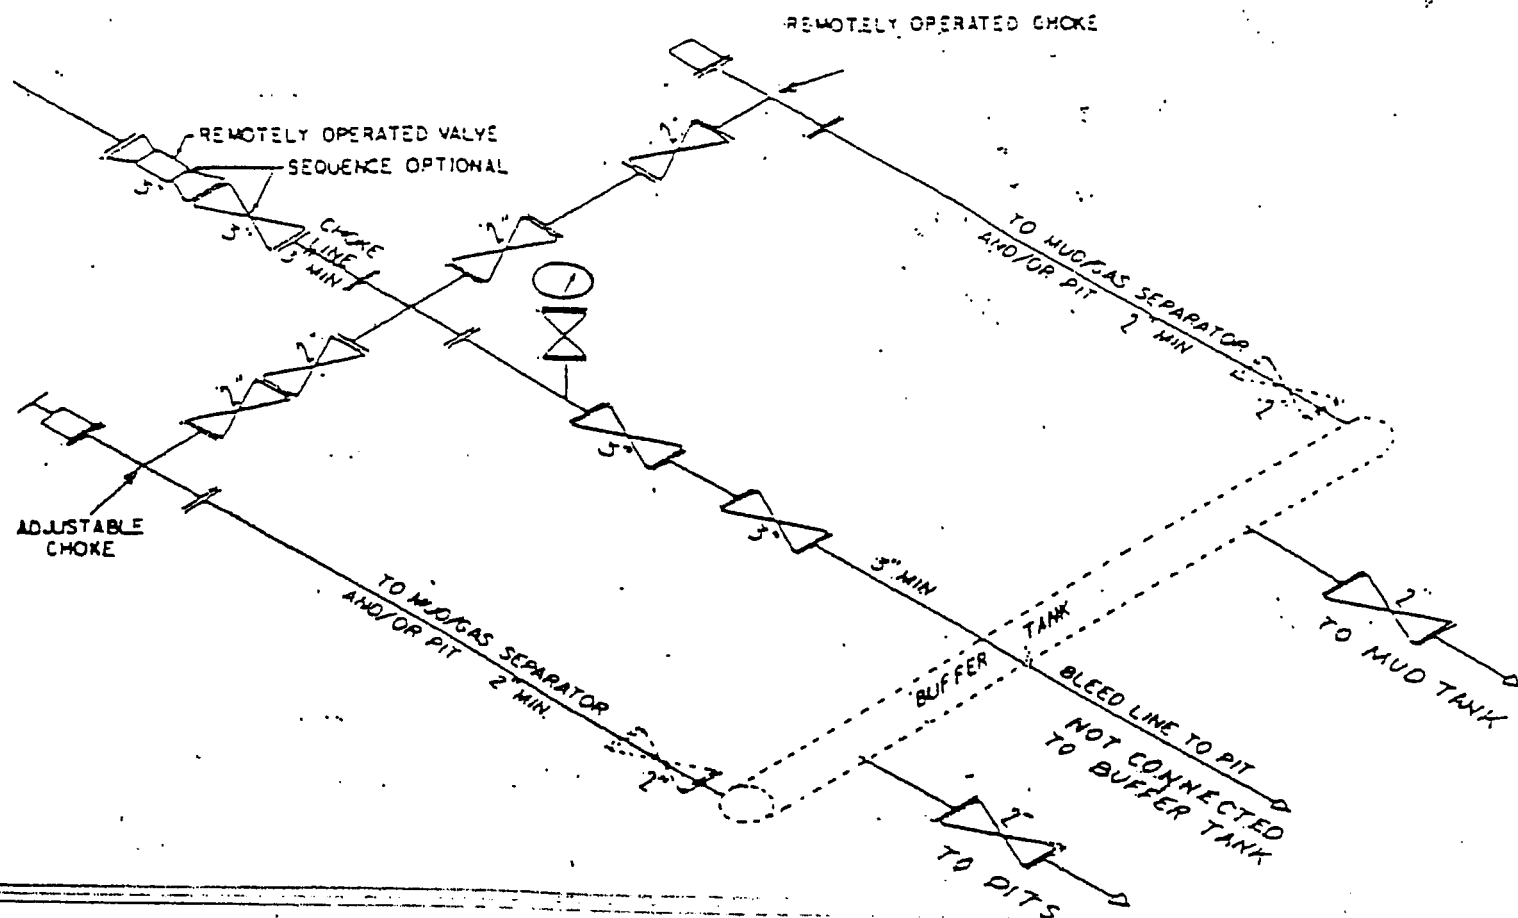


② 5M CHOKE MANIFOLD EQUIPMENT — CONFIGURATION OF CHOKES MAY VARY

DRILLING PROGRAM


Purpose:

The stack arrangement with the 7" liner hanger allows an 11" stack to fit in the sub of Ensign 24 and True 32. This arrangement requires using a 5000 psi 13-5/8" double gate stack until the 9-5/8" is set. After the 9-5/8" casing is set, a spacer spool is nipped down and an 13-5/8" 5000 psi x 13-5/8" 10,000 psi "B" section is nipped up. The 11" 10K stack is nipped up on top of the "B" section.

BOP Requirements:

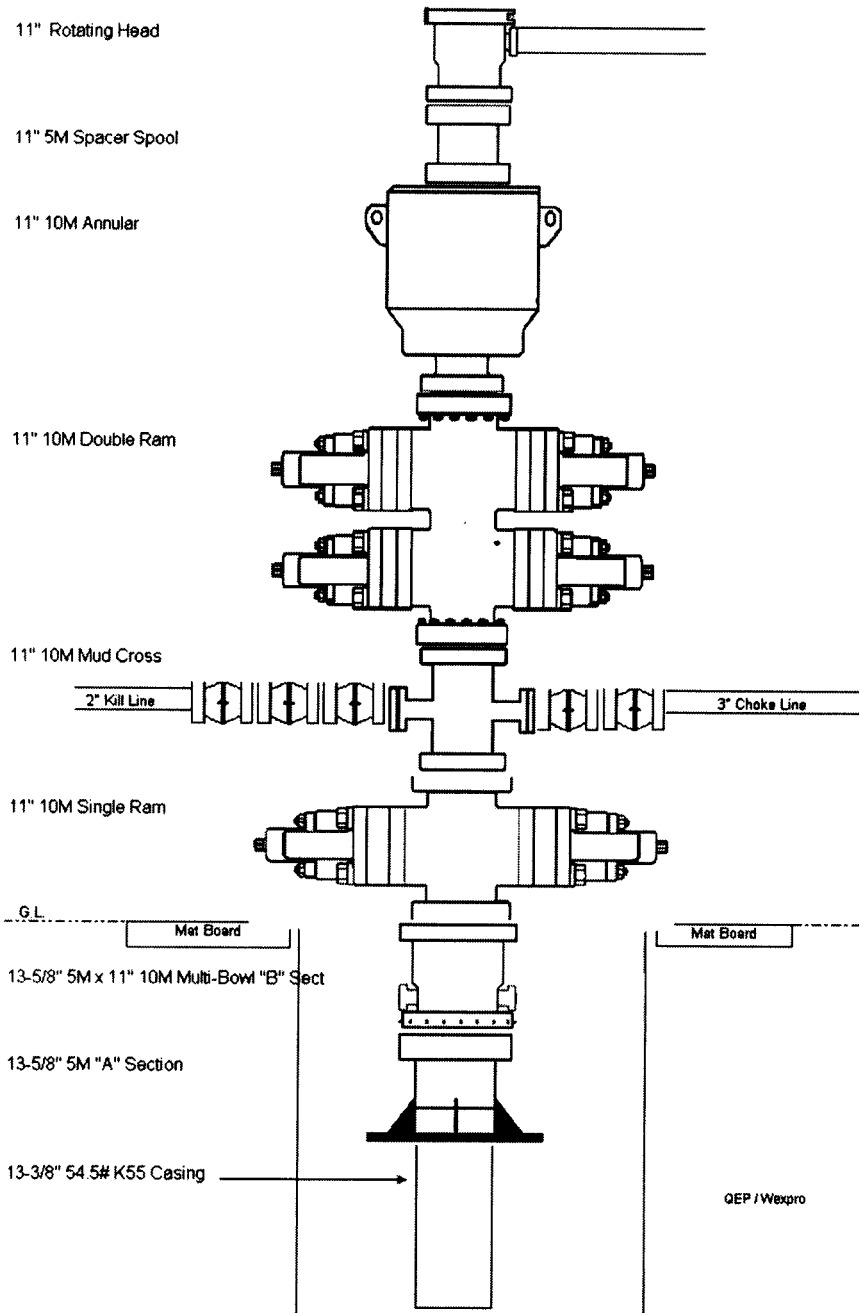

Attachment I. Diagrams of Choke Manifold Equipment

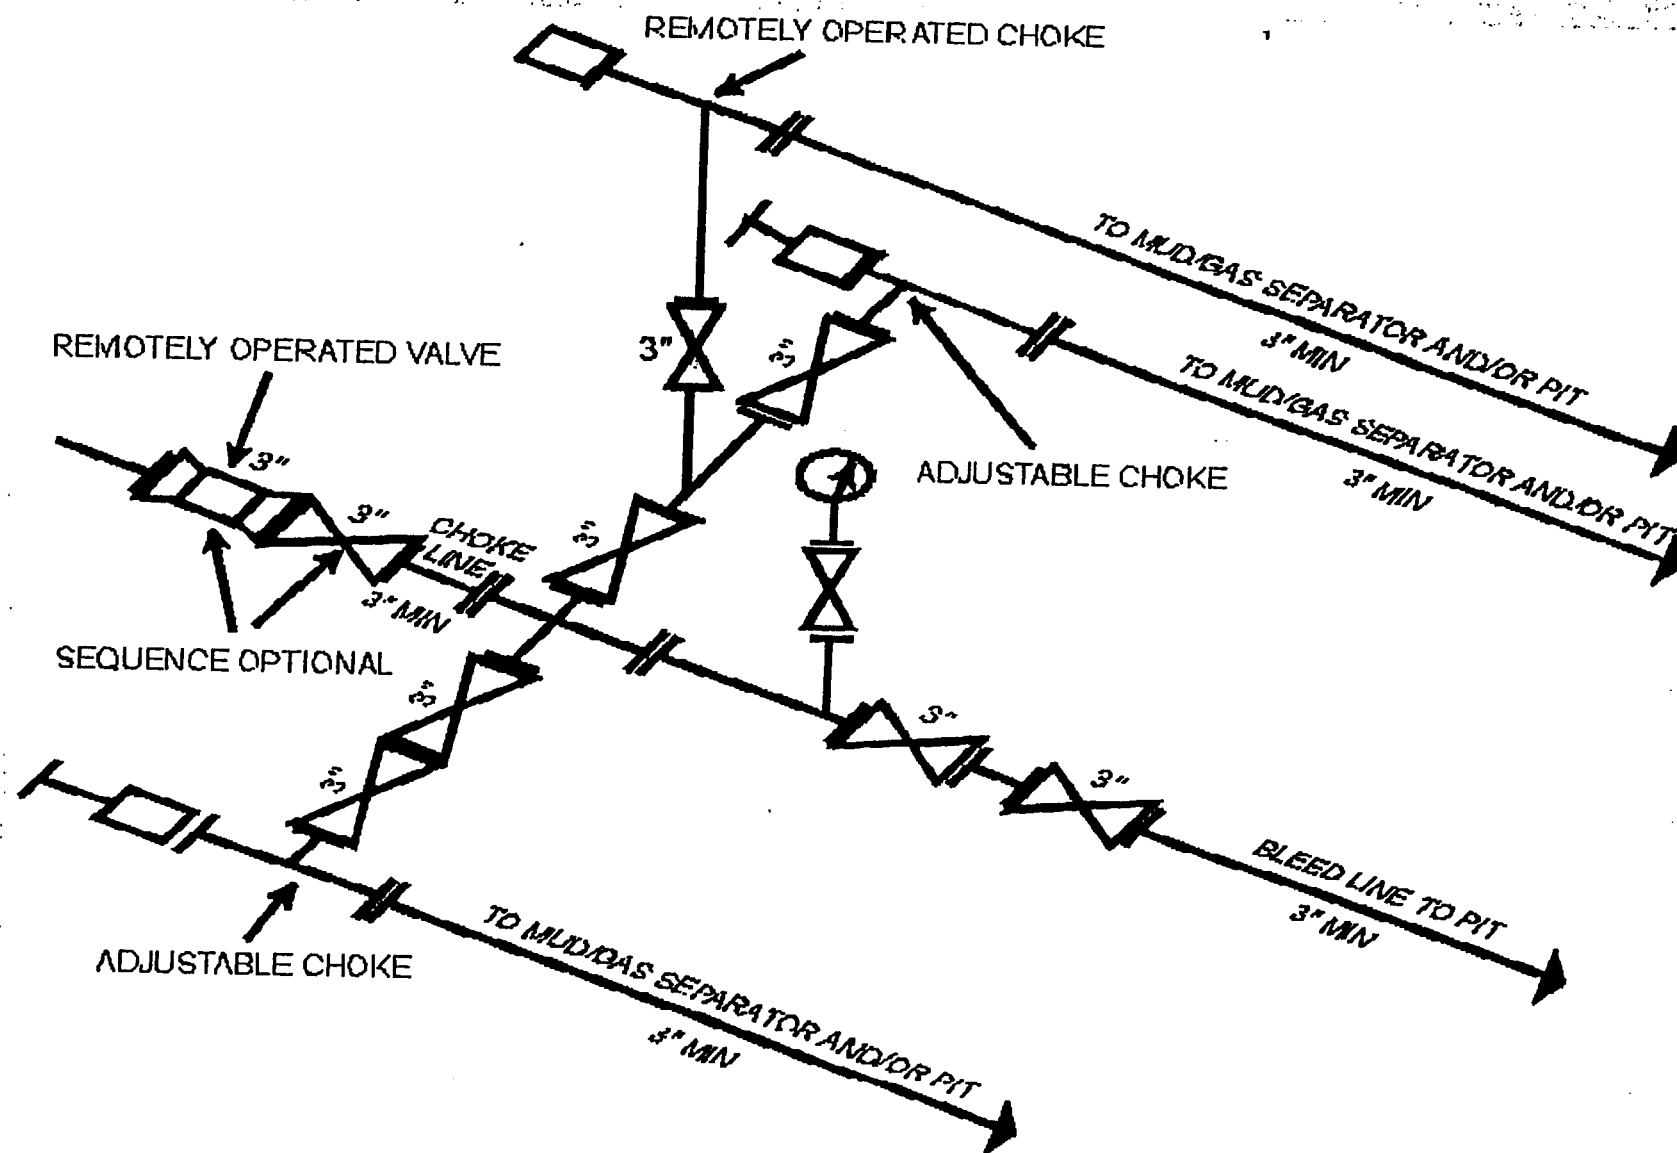

I-4 10M and 15M Choke Manifold Equipment -- Configuration of chokes may vary

[54 FR 39528, Sept. 27, 1989]

Last Updated March 25, 1997 by John Broderick

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-01089
2. NAME OF OPERATOR: QUESTAR EXPLORATION & PRODUCTION CO.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: N/A
3. ADDRESS OF OPERATOR: 11002 E. 17500 S. CITY VERNAL STATE UT ZIP 84078		7. UNIT or CA AGREEMENT NAME: WHITE RIVER UNIT
4. LOCATION OF WELL FOOTAGES AT SURFACE: 191' FNL 2555' FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: NENW 35 8S 22E		8. WELL NAME and NUMBER: WRU EIH 3AD-35-8-22
PHONE NUMBER: (435) 781-4301		9. API NUMBER: 4304738644
COUNTY: UINTAH		10. FIELD AND POOL, OR WILDCAT: WHITE RIVER
STATE: UTAH		

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA			
TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>APD EXTENSION</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

QUESTAR EXPLORATION & PRODUCTION CO. hereby requests a 1 year extension on the WRU EIH 3AD-35-8-22.

CONFIDENTIAL

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 09-27-07
By: [Signature]

9-28-07
Rm

NAME (PLEASE PRINT) <u>Laura Bills</u>	TITLE <u>Regulatory Affairs</u>
SIGNATURE <u>[Signature]</u>	DATE <u>9/19/2007</u>

(This space for State use only)

RECEIVED
SEP 24 2007 CONFIDENTIAL

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 43-047-38644
Well Name: WRU EIH 3AD-35-8-22
Location: 191' FNL 2555' FWL, NENW, SEC. 35 T8S R22E.
Company Permit Issued to: QUESTAR EXPLORATION & PRODUCTION C
Date Original Permit Issued: 9/25/2006

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes ☐ No ☒

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes ☐ No ☒


Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes ☐ No ☒

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes ☐ No ☒

Has the approved source of water for drilling changed? Yes ☐ No ☒

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes ☐ No ☒

Is bonding still in place, which covers this proposed well? Yes ☒ No ☐


Signature

9/19/2007
Date

Title: REGULATORY AFFAIRS

Representing: Questar Exploration & Production Co.

RECEIVED
SEP 24 2007
DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

FORM APPROVED
OMB No. 1004-0135
Expires July 31, 1996

5. Lease Serial No.

UTU - 01089

6. If Indian, Allottee or Tribe Name

N/A

7. If Unit or CA/Agreement, Name and/or No.

WHITE RIVER UNIT

8. Well Name and No.

WRU EIH 3AD-35-8-22

9. API Well No.

43-047-38644

10. Field and Pool, or Exploratory Area

WHITE RIVER

11. County or Parish, State

Uintah

SUBMIT IN TRIPLICATE - Other Instructions on reverse side

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

QEP Uinta Basin, Inc.

Contact: Jan Nelson

3a. Address

11002 East 17500 South, Vernal, UT 84078

3b. Phone No. (include area code)

435-781-4331

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

191' FNL 2555' FWL, NENW, SECTION 35, T8S, R22E

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	APD EXTENSION
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once Testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

Questar Exploration & Production Company hereby requests a one year extension on the APD for the WRU EIH 3AD-35-8-22.

BLM APD approval date: 01/29/2007

CONDITIONS OF APPROVAL ATTACHED

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

Laura Bills

Title

Regulatory Affairs

Signature

Laura Bills

Date

November 26, 2007

THIS SPACE FOR FEDERAL OR STATE USE

Approved by

Mark Baker

Title

Petroleum Engineer

Date

DEC 03 2007

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

DEC 28 2007

CONFIDENTIAL

UDOGM

DIVISION OF OIL & GAS

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 43-047-38644
Well Name: WRU EIH 3AD-35-8-22
Location: 191' FNL 2555' FWL, NENW, SEC. 35, T8S, R22E
Company Permit Issued to: Questar Exploration & Production Co.
Date Original Permit Issued: 1/29/2007

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes ☐ No ☒

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes ☐ No ☒


Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes ☐ No ☒

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes ☐ No ☒

Has the approved source of water for drilling changed? Yes ☐ No ☒

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes ☐ No ☒

Is bonding still in place, which covers this proposed well? Yes ☒ No ☐


Signature

11/26/2007

Date

Title: Regulatory Affairs

Representing: Questar Exploration & Production Co.

CONDITIONS OF APPROVAL

QEP Uinta Basin Inc.

Notice of Intent APD Extension

Lease: UTU-01089
Well: WRU EIH 3AD-35-8-22
Location: NENW Sec 35-T8S-R22E

An extension for the referenced APD is granted with the following conditions:

1. The extension and APD shall expire on 1/29/09
2. No other extension shall be granted.

If you have any other questions concerning this matter, please contact Matt Baker of this office at (435) 781-4490

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

CONFIDENTIAL

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-01089
2. NAME OF OPERATOR: QUESTAR EXPLORATION AND PRODUCTION COMPANY		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: N/A
3. ADDRESS OF OPERATOR: 11002 E. 17500 S. CITY VERNAL STATE UT ZIP 84078		7. UNIT or CA AGREEMENT NAME: WHITE RIVER UNIT
4. LOCATION OF WELL FOOTAGES AT SURFACE: 191' FNL 2555' FWL		8. WELL NAME and NUMBER: WRU EIH 3AD-35-8-22
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: NENW 35 8S 22E		9. API NUMBER: 4304738644
COUNTY: UINTAH		10. FIELD AND POOL, OR WILDCAT: WHITE RIVER
STATE: UTAH		

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA			
TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>APD EXTENSION</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Questar Exploration & Production Company hereby requests a 1 year extension on the WRU EIH 3AD-35-8-22.

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 09-30-2008
By: [Signature]

NAME (PLEASE PRINT) <u>Jan Nelson</u>	TITLE <u>Regulatory Affairs</u>
SIGNATURE <u>[Signature]</u>	DATE <u>9/25/2008</u>

(This space for State use only)

COPY SENT TO OPERATOR

Date: 10-2-2008

Initials: KS

RECEIVED

SEP 29 2008

DIV. OF OIL, GAS & MINING

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 4304738644
Well Name: WRU EIH 3AD-35-8-22
Location: 191' FNL 2555' FWL, NENW SEC. 35, T8S, R22E
Company Permit Issued to: Questar Exploration & Production Company
Date Original Permit Issued: 9/25/2006

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes ☐ No ☒

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes ☐ No ☒


Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes ☐ No ☒

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes ☐ No ☒

Has the approved source of water for drilling changed? Yes ☐ No ☒

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes ☐ No ☒

Is bonding still in place, which covers this proposed well? Yes ☒ No ☐



Signature

9/25/2008

Date

Title: Regulatory Affairs

Representing: Questar Exploration & Production Company

RECEIVED

SEP 29 2008

DIV. OF OIL, GAS & MINING



JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

January 22, 2009

43 047 38644
WRU EIH 3AD-35-8-22
85 22E 35

Laura Bills
Questar Exploration & Prod. Co.
11002 East 17500 South
Vernal, Utah 84078

Re: APDs Rescinded at the request of Questar Exploration & Prod. Co.

Dear Ms. Bills:

Enclosed find the list of APDs that you requested to be rescinded to Questar Exploration & Production Company. No drilling activity at these locations has been reported to the division. Therefore, approval to drill these wells is hereby rescinded, effective January 20, 2009.


A new APD must be filed with this office for approval prior to the commencement of any future work on the subject locations.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,

Diana Mason
Environmental Scientist

cc: Well File
Bureau of Land Management, Vernal



GH 3MU-19-8-21	43-047-38250
GH 4MU-19-8-21	43-047-38264
GH 5MU-19-8-21	43-047-38265
GH 6MU-19-8-21	43-047-38266
GH 11MU-19-8-21	43-047-38268
GH 12MU-19-8-21	43-047-38269
GH 15MU-19-8-21	43-047-38270
WRU EIH 3AD-35-8-22	43-047-38644
COY 15ML-14-8-24	43-047-37935



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Green River District-Vernal Field Office

170 South 500 East

Vernal, UT 84078

(435) 781-4400 Fax: (435) 781-4410

<http://www.blm.gov/ut/st/en/fo/vernal/html>



IN REPLY REFER TO:

3160

LLUTG01100

February 4, 2009

Jan Nelson
Questar Exploration & Production Co.
11002 East 17500 South
Vernal, UT 84078

43-047-38644

Re: Notice of Expiration
Well No. WRU EIH 3AD-35-8-22
NENW, Sec. 35, T8S, R22E
Uintah County, Utah
Lease No. UTU-01089
White River Unit

Dear Ms. Nelson:

The Application for Permit to Drill the above-referenced well was approved on January 29, 2007. A one (1) year extension of the original APD was requested. The request was reviewed and the extension approved until January 29, 2009. According to our records, no known activity has transpired at the approved location. In view of the foregoing, this office is notifying you that the approval of the referenced application has expired. If you intend to drill at this location in the future, a new Application for Permit to Drill must be submitted.

This office requires a letter confirming that no surface disturbance has been made for this drill site. Any surface disturbance associated with the approved location of this well is to be rehabilitated. A schedule for this rehabilitation must be submitted to this office. Your cooperation in this matter is appreciated.

If you have any questions regarding this matter, please contact me at (435) 781-4455.

Sincerely,

Cindy Severson

Cindy Severson
Land Law Examiner

cc: UDOGM

RECEIVED

FEB 10 2009

DIV. OF OIL, GAS & MINING